



CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL,

PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MOBILE ACCESS TO LIGHTWEIGHT DIRECTORY ACCESS PROTOCOL (LDAP) SERVER

This application claims benefit of and priority to United States Provisional Patent Application Ser. No. 60/365,519, filed March 20, 2002, the entire disclosure of which is
5 incorporated herein by reference.

BACKGROUND1. Technical Field

The present invention is directed toward a system and method of handling a
10 database service request to a database server for a database service. In particular, the system and method is directed to enabling cryptographic information stored in database servers to be sent to a mobile data communication device ("mobile device") for cryptographic e-mail messaging.

15 2. Description of the Related Art

A cryptographic e-mail message can be a signed message, an encrypted message, or a signed and encrypted message. Standards supporting cryptographic messaging include Secure Multipurpose Internet Mail Extensions (S/MIME), Pretty Good Privacy™ (PGP™), OpenPGP and other secure e-mail standards and protocols. Cryptographic
20 information, such as digital certificates, public keys, and the like, is often stored in a server accessible over a network, such as a Lightweight Directory Access Protocol (LDAP) server. When a cryptographic message is to be sent by a user of a computer device, the cryptographic information, such as a public key corresponding to a recipient's e-mail address, may not be directly available to the user. The cryptographic information may
25 instead be obtained by querying the directory of an LDAP server.

On a desktop system, the sender may, for example, use a browser program to perform a multi-pass query with the LDAP server to select specific cryptographic information from the LDAP server. Some actions available to a desktop user, however, may not be available to a mobile device user. Furthermore, LDAP queries can return large responses that may exceed the storage capacity of the mobile device, as well as exceed the bandwidth capacity of a wireless network if the mobile device is configured for wireless data communication over the wireless network.

SUMMARY

A system for handling an LDAP service request to an LDAP server for an LDAP service comprises a client program executable on a client system and a handler program executable on a handler system. The client program is operable to generate LDAP service request data corresponding to the LDAP service and provide the LDAP service request data for transmission from the client system, and further operable to receive LDAP service reply data in response to the LDAP service request data. The handler program is operable to receive the LDAP service request data transmitted from the client system and execute the LDAP service request to the LDAP server, receive LDAP service reply data from the LDAP server during one or more passes, and upon completion of the LDAP service, provide the LDAP service reply data for transmission to the client system in a single pass.

Another system for handling an LDAP service request to an LDAP server for an LDAP service comprises a handler program executable on a handler system. The handler program is operable to receive LDAP service request data corresponding to the LDAP service request and execute the LDAP service request to the LDAP server, receive LDAP service reply data from the LDAP server during one or more passes, throttle the LDAP service reply data to generate throttled LDAP service reply data if the LDAP service reply

data exceeds a threshold, and provide the LDAP service reply data or the throttled LDAP service reply for transmission to the client system in a single pass.

A method for handling an LDAP service request to an LDAP server for an LDAP service comprises the steps of receiving LDAP service request data transmitted from a client system, executing at the client system the LDAP service request to the LDAP server, receiving LDAP service reply data from the LDAP server during one or more passes during execution of the LDAP service, and transmitting the LDAP service reply data received at the handler system to the client system in a single pass.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B provide a block diagram of an illustrative communication system in which an LDAP service request is processed;

Fig. 2 illustrates a system for handling an LDAP service request to an LDAP server;

Fig. 3 provides a flow chart of an illustrative method for handling an LDAP service request;

Fig. 4 is a block diagram of an illustrative client system used in a system for handling an LDAP service request, the client system comprising a mobile device;

Fig. 5 provides a flow chart of an illustrative method for an LDAP client query method;

Fig. 6 provides a flow chart of an illustrative method for an LDAP client record reception method;

Fig. 7 provides a flow chart illustrating a process of generating and executing automatic LDAP server queries for data items to be redirected to a mobile device;

Fig. 8 provides a functional block diagram illustrating the handling of a client information request by a request handler executed at a handler system; and

Fig. 9 provides a functional block diagram illustrating the handling of a client information request by a request handler executed at a server system.

5

DETAILED DESCRIPTION

Figs. 1A and 1B provide a block diagram of an illustrative communication system in which an LDAP service request is processed. The communication system comprises a message server 10, the Internet 20, an LDAP server 40, a wireless gateway 85, a wireless
10 infrastructure 90, a wireless network 105, and a mobile device 100. The LDAP server 40 is illustratively configured to provide cryptographic information, such as an X.509 digital certificate 30. The message server 10 operates a message server software module, such as an S/MIME server, and is configured to send and receive S/MIME messages such as S/MIME message 50.

15

The message server 10 may be connected to a carrier or an Internet Service Provider (ISP). The user may have an account on the message server 10 so that the user may send and receive electronic messages, such as e-mail and the like. Of course, the communication system components shown in Fig. 1 may alternatively be connected to a wide area network (WAN) other than the Internet, such as a company-wide WAN.

20

The message server 10 and the LDAP server 40 may be implemented on one or more network computers protected by a firewall program, one or more computers within an ISP or Application Service Provider (ASP) system or the like, and provide e-mail and LDAP services. Servers such as the message server 10 and the LDAP server 40 may also include dynamic database storage engines that have predefined database formats for
25 calendar data, to-do lists, task lists, e-mail, addresses, documentation, and the like.

The wireless gateway 85 and the wireless infrastructure 90 provide a link between the Internet 20 and the wireless network 105, and collectively form an exemplary mobile information transfer mechanism. The wireless infrastructure determines the most likely network for locating a given mobile device 100 and tracks the mobile device 100 as it
5 roams between countries or networks.

The particular wireless network 105 may be virtually any wireless network over which information may be exchanged with a mobile device. For example, the wireless network may be a data-centric wireless network, a voice-centric wireless network, or a dual-mode network that can support both voice and data communications over the same
10 physical base stations. Exemplary combined dual-mode networks include the Code Division Multiple Access (CDMA) network, the Groupe Special Mobile or the Global System for Mobile Communications (GSM) and the General Packet Radio Service (GPRS) network, and third-generation (3G) networks such as Enhanced Data-rates for Global Evolution (EDGE) and Universal Mobile Telecommunications Systems (UMTS).
15 Examples of data-centric networks include the Mobitex™ Radio Network, and the DataTAC™ Radio Network. Examples of voice-centric data networks include Personal Communication Systems (PCS) networks like CDMA, GSM, and TDMA systems.

For each type of wireless network 105 and the specific information transfer mechanism controlling the forwarding and sending of data items to and from the mobile
20 device 100, data items, such as e-mail messages, are sent via the wireless gateway 85 to the mobile device 100. An exemplary mobile device 100 may be of the type disclosed in United States Patent No. 6,278,442, entitled "HAND-HELD ELECTRONIC DEVICE WITH A KEYBOARD OPTIMIZED FOR USE WITH THE THUMBS," the entire disclosure of which is incorporated herein by reference. The data items may be sent to the
25 wireless gateway 85 via a redirector system 11 in communication with the message server

10. An exemplary redirection system may be of the type disclosed in United States Patent No. 6,219,694, entitled "SYSTEM AND METHOD FOR PUSHING INFORMATION FROM A HOST SYSTEM TO A MOBILE DATA COMMUNICATION DEVICE HAVING A SHARED ELECTRONIC ADDRESS," the entire disclosure of which is
5 incorporated herein by reference.

The wireless infrastructure 90 includes a series of connections to the wireless network 105. These connections can be an Integrated Services Digital Network (ISDN) connection, a Frame Relay connection, or a T1 connection using the TCP/IP protocol.

As shown in Fig. 1, the mobile device 100 sends a Uniform Resource Identifier
10 (URI) 15 corresponding to a resource request from the LDAP server 40. The URI 15 is, for example, an LDAP query for an X.509 digital certificate 30 containing a public key 35. The public key 35 is required to encrypt the e-mail message 5 and send the S/MIME message 50. The wireless gateway 85 receives the URI 15 and a handler program executed at the wireless gateway 85 performs a traditional LDAP query on behalf of
15 mobile device 100. The URI 15 arrives at the LDAP server 40, which in turn responds by sending a multi-pass response 25 to the requesting client. The multi-pass response 25 may comprise multiple exchanges of data during multiple passes 27.

The multi-pass response 25 comprises a normal information exchange between the LDAP server 40 and the client. In this particular embodiment, the wireless gateway 85
20 includes a handler program that manages the LDAP query from the mobile device 100. Thus, the requesting client is the wireless gateway 85. Traditional LDAP communication techniques are used between the wireless gateway 85 and LDAP server 40.

As illustrated, information retrieval is performed via a query directed to the LDAP server 40 via the URI 15. The LDAP server 40 returns the response 25, which includes
25 any results or errors, directly to the requesting client that transmitted the query via the URI

15, which in this embodiment is the wireless gateway 85. Typically, the LDAP server 30 responds in multiple passes 27.

Although LDAP server 40 is required to return responses whenever such responses are defined, the LDAP server 40, and the wireless gateway 85, which is functioning as an LDAP client, are not required to communicate synchronously. This results in the multi-pass response 25 being "chatty" and is not conducive to conducting an LDAP query with the mobile device 100 as the LDAP client, as the wireless network 105 and the RF link 107 are of relatively limited bandwidth and high latency as compared to the Internet 20.

The LDAP server 40 provides a directory service over the Internet 20 whereby information, such as e-mail addresses, contact information, and cryptographic information may be retrieved. One example of such information is a digital certificate 30 having a public key 35, which can be retrieved via a query on a Directory Information Tree (DIT) served by one or more LDAP servers 40 and 41. Furthermore, since a DIT can be jointly provided by one or more LDAP servers 40 and 41, the LDAP server 40 may respond to the URI 15 with a referral URI 16 directed to the LDAP server 41. The LDAP server 41 will issue a response 26 to the wireless gateway 85 functioning as the LDAP client in an analogous manner as the LDAP server 40 responds to the URI 15, i.e., the response 26 may comprise multiple passes 28. This referral may make the LDAP exchange even more chatty.

The wireless gateway 85 receives the URI query 15 from the mobile device 100, performs the query on behalf of mobile device 100, and responds to the mobile device 100 with a single pass communication. At least one subset of the information received at the wireless gateway 85 in the traditional LDAP multi-pass response 25 is sent and delivered in the single-pass response 45 to the mobile device 100. Because the wireless network 105 communications over the RF link 107 typically have high latency as compared to

communications over the Internet 20, the single-pass response 45 makes better use of resources for transmitting over a RF link 107 and wireless network 105. Thus, the wireless gateway 85 shields the wireless network 105 from the "chatty" nature of traditional LDAP communications by performing the traditional LDAP query on behalf of
5 a mobile device 100.

In the case of cryptographic directory service, the LDAP server 40 is used to obtain a digital certificate 30 having a public key 35 required to encrypt an e-mail message 5. Different cryptographic standards may be used in the communication system, resulting in different types of cryptographic information being received. For example, in the case of
10 X.509 cryptographic information, the LDAP server 30 may provide one or more attributes, such as "userCertificate", "cACertificate", "authorityRevocationList", "certificateRevocationList", "crossCertificatePair", "supportedAlgorithms", and "deltaRevocationList".

The data are usually transmitted over the wireless network 105 in binary form, and
15 the response 25 to the URI 15 may comprise a relatively large amount of data. For example, a query for a digital certificate 30 comprising a long certification path may yield a response that includes the certification authority (CA) certificates signed by multiple authorities up to a root CA, or may return more than one certificate. Therefore, in addition to the traditional LDAP response 25 received by the wireless gateway 85 being chatty, the
20 response 25 may also be too large for the relatively limited bandwidth of wireless network 85. Furthermore, if the mobile device 100 has a limited memory store, data from the response 25 may also exceed the limited capacity of memory store of the mobile device 100.

Thus, the single-pass response 45 may also be "throttled" and compressed to
25 compensate for the low bandwidth of the wireless network 105 and the RF link 107.

Accordingly, the wireless gateway 85 shields the wireless network 105 and the RF interface 107 from an LDAP server response comprising a large amount of data.

Thus, when the wireless gateway 85 sends a URI query 15 for cryptographic information on behalf of the mobile device 100, then the mobile device 100 receives the single-pass throttled and compressed response 45 suitable for the low bandwidth, high latency wireless network 105 and RF link 107. The mobile device 100 is thus enabled to encrypt the e-mail message 5, and is thereby able to send a cryptographic message 50 using cryptographic information obtained over the wireless network 105 and RF link 107.

Fig. 2 illustrates in greater detail a system for handling an LDAP service request to an LDAP server. The mobile device 100 is configured to operate an LDAP client software module 200, and an e-mail client software module 300 having a cryptographic processing block 350. The wireless gateway 85 is configured to operate an LDAP handler software module 400 and mobile e-mail agent software module 500. The message server system 10 is configured to operate a message server software module 700, such as an S/MIME server software. The LDAP server system 40 is configured to operate an LDAP server software module 600.

The message server system 10, the LDAP server system 40, and the wireless gateway 85 may be implemented on any variety of computing devices, such as a computer having one or more processors, a memory storage subsystem, and one or more network interface cards configured to communicate over the networks illustrated in Fig. 1. An exemplary mobile device is as previously described and as further described below with reference to Fig. 4.

A user of the mobile device 100 may compose, reply to, or forward an e-mail message 5 to another user having an account on the message server system 10. The e-mail message 5 is to be encrypted into an S/MIME message 50 according to the S/MIME

standard. However, the crypto block 350 requires at least one public key 35 corresponding to a private key of the recipient of the e-mail message 5. The public key 35, however, is not stored in a memory store of the mobile device 100, and thus the user of the mobile device 100 must send a query to an LDAP server 40 to obtain the public key 35.

The e-mail client 300 provides an e-mail address 7, or alternatively a common name or other user information, corresponding to the intended recipient(s) of the e-mail message 5 to the LDAP client 200, which in turn formulates a URI 15 that requests the digital certificate 30 corresponding to the recipient. The URI 15 is transmitted to the wireless gateway 85, and the LDAP handler software 400 executes the LDAP query to the LDAP server 40. The LDAP server software 600 receives the URI 15 and provides the multi-pass response 25, which includes the digital certificate 30, back to the wireless gateway 85. Upon completion of the LDAP query, the wireless gateway 85 transmits the digital certificate 30 to the mobile device 100 in a single pass.

Fig. 3 provides a flow chart of an illustrative method 800 for handling an LDAP service request. At step 810, the mobile device 100 receives a trigger for an event requiring LDAP directory information. The trigger in the exemplary embodiment described with reference to Figs. 1 and 2 is an encryption command to encrypt an e-mail message 5. As previously described, the encryption operation requires the public key 35 of the digital certificate 30, which is stored at the LDAP server 40. Of course, other events may also be used to trigger other LDAP services, such as acquiring an e-mail address, contact information, or other data stored in the LDAP server 40.

In step 815, a URI query is generated. The query is illustratively a standard LDAP query. The URI may include known LDAP data such as the protocol prefix "ldap://"; a domain name host such as the domain name for a root CA, such as "directory.ldap40.com"

corresponding to the internet address of the LDAP server 40; an optional port number over which a stream is initiated, such as the default port “:389”, and optional base query DN followed by other known LDAP query parameters. Thus an example URI generated by the mobile device 100 would be “ldap://directory.ldap40.com:389/{optional parameters}”.

5 In step 820, the URI 15 query is sent to the LDAP handler 400 at the wireless gateway 85. Note that the URI 15 query is not sent directly to the Internet address corresponding to domain name “directory.ldap40.com”, but instead is sent to the wireless gateway 85 for further processing by LDAP handler software 400. This can be accomplished by sending the URI 15 query as payload data in a communication directed
10 to the wireless gateway 85, for example. Other methods for directing the URI 15 query to the LDAP handler software 400 at the wireless gateway 85 may also be used.

 In step 825, the URI 15 query is sent to an LDAP server 40 by the LDAP handler 400 on behalf of a mobile device 100. Thus, once the LDAP handler 400 receives the URI 15 query, the URI 15 query is sent to the Internet address corresponding to the domain
15 name in the URI 15. Continuing with the example, the URI 15 query is sent to the Internet address corresponding to “directory.ldap40.com”. At this step, the LDAP handler 400 functions as a traditional LDAP client in order to shield the wireless network 85 and the RF link 107 from the chatty and bulky LDAP communication.

 In step 830, at least one multi-pass response 45 is received at the LDAP handler
20 400. The LDAP handler 400 continues to function as a traditional LDAP client up until the response is received, at which point the next step 835 may begin, at which time the LDAP handler may also function as an optimized LDAP server with respect to the mobile device 100.

 In step 835, a single-pass response having at least a portion of the at least one
25 multi-pass response of step 830 is generated. By generating the single pass response 45 to

the URI 15 query, the LDAP handler 400 shields the mobile device 100 from the chatty LDAP communication.

Step 840 determines if the single-pass response 45 is too large for the limited bandwidth of the wireless network 105 and the RF link 107, or for the limited storage
5 capability of the mobile device 100. All multiple passes 27 need not be received in order to make this determination. For example, steps 830, 835 and 840 may concurrently cooperate and monitor the received LDAP data and the single pass response being generated. Then, if a URI 15 query would normally return a multi-pass response having 100 records, step 840 may determine that the response is too large after a threshold, such
10 as a threshold number of records, has been received. The determination can thus be made before the 100 records of the multi-pass response are fully received at step 830.

If the response is determined to be large, then step 845 ensues; or else step 850 ensues.

In step 845, the single-pass response 45 is throttled. Throttling limits the data to
15 be transmitted to the mobile device 100. For example, if a threshold number of records received is exceeded, then the LDAP handler 400 may delete the records that are subsequently received after the reception of the threshold record. Furthermore, additional refinement data may be appended to the retained records. Upon receiving the throttled single pass response, the LDAP client 200 operating in the mobile device 100 may then
20 advise the mobile user to refine the URI query to receive subsequent or alternate records.

In step 850, the single-pass response is compressed. The single-pass response is more amenable to compression because single-pass data packets tend to be fuller than multi-pass packets – and thus more likely to have redundancies, which can be compressed, for example, by run length encoding or other known encoding schemes.

In step 860, the single-pass response is sent to the mobile device 100, and in step 860, the single pass response is received at the mobile device 100. In step 865, the single-pass response is decompressed.

5 In step 870, the LDAP directory information is extracted from the single-pass response. The mobile device 100 thereafter has available to it the requested information that was stored at the LDAP server 40.

10 In step 875, the mobile device 100 determines if the requested LDAP directory information required at step 810 was extracted at step 870. If the requested LDAP directory information is present, then step 885 ensues. If the required information is not present, then step 880 ensues.

15 In step 880, the URI 15 query may be refined to further throttle subsequent single-pass responses or refine the search at the LDAP server 40. This may be desirable, for example, if a record in step 845 is provided in the single-pass response advising the user to further refine the URI query after truncating the record set to within a threshold size; or if the single-pass response indicates that no data responsive to the URI 15 query is available at the LDAP server 40. If the mobile device 100 user refines the URI query, then step 820 and subsequent steps are executed anew.

20 In step 885, the action requiring the LDAP directory information is optionally executed. For example, a public key 35 in the digital certificate 30 can be used to encrypt the e-mail 5 into the S/MIME e-mail 50, which is then sent from the mobile device 100. The user can preferably be provided an option to not execute the action, however, such as by the mobile device 100 generating a user prompt at an I/O device. For example, the user may be prompted to confirm the encryption of e-mail message 5 using the public key 35, and/or to send the e-mail message 5 or S/MIME e-mail 50.

In an alternate embodiment, step 810 need not necessarily occur at the mobile device 100. For example, the wireless gateway 85 may also receive an S/MIME message 50 to be transmitted to the mobile device 100. If the S/MIME message 50 to be transmitted to the mobile device 100 is signed with a digital signature, the pending transmission can be a trigger event to cause LDAP handler software 400 at the wireless gateway 85 to pre-emptively query the LDAP server 40 to obtain the certificate 30 and public key 35 for the signer of the S/MIME message, as well as any certificate revocation lists or other cryptographic information required to verify the S/MIME message. The cryptographic information may then be obtained before the S/MIME message 50 is transmitted to the mobile device 100, in which case the S/MIME message 50 is stored at the wireless gateway 85. The LDAP handler software 400 may be further operable to discard the S/MIME message 50 if the signature verification fails and/or is not trusted, or alternatively transmit the digital certificate 30 retrieved with the S/MIME message 50. In another embodiment, the wireless gateway 85 is configured to verify a digital signature and transmit the S/MIME message 50 with a verification result of valid or invalid, thus conserving processing resources at the mobile device 100.

In another alternate embodiment, the redirector system 11 may store and execute the LDAP handler program. If the S/MIME message 50 to be redirected to the mobile device 100 is signed with a digital signature, the pending transmission can be a trigger event to cause LDAP handler software 400 at the redirector system 11 to pre-emptively query the LDAP server 40 to obtain the certificate 30 and public key 35 for the signer of the S/MIME message, as well as any certificate revocation lists or other cryptographic information required to verify the S/MIME message. The cryptographic information may then be obtained before the S/MIME message 50 is redirected to the mobile device 100, in which case the S/MIME message 50 is stored at the redirector system 11. The LDAP

handler software 400 may be further operable to discard the S/MIME message 50 if the signature verification fails and/or is not trusted, or alternatively transmit the digital certificate 30 retrieved with the S/MIME message 50. In another embodiment, the redirector system 11 is configured to verify a digital signature and transmit the S/MIME message 50 with a verification result of valid or invalid, thus conserving processing resources at the mobile device 100.

Fig. 7 provides a flow chart 1200 illustrating one such process of generating and executing automatic LDAP server queries for data items to be transmitted to a mobile device 100. The process is illustratively carried out at the wireless gateway 85 in a similar manner as described above. In step 1202, the wireless gateway 85 receives a data item to be transmitted to a mobile device 100. The data item may be, for example, an S/MIME message 50 including encryption data, such as a digital signature.

In step 1204, the wireless gateway 85 scans the data item to determine if the data item includes encryption data. If the data item includes encryption data, such as the digital signature, then step 1206 is performed; or else step 1220 is performed.

In step 1206, a URI query is generated and sent to the LDAP server 40. The query is illustratively a standard LDAP query, as described above. Steps 1208, 1210, 1212, 1214 and 1216 are then performed in a similar manner as described with reference to steps 830, 835, 840, 845 and 850 of Fig. 3. In step 1218, the single pass response is appended to the data item. Step 1220 is then executed, and the data item is sent to the mobile device 100. Because step 1218 appends the single pass response to the data item, the mobile device 100 receives all required cryptographic information from the LDAP server 40 for the verification of the data item upon initial receipt of the data item. Thus, the mobile device 100 need not generate a URI 15 query.

In another alternate embodiment, other cryptographic applications using secure socket layer (SSL), such as a web browser application, may require server and/or client certificates, certificate revocation lists, and/or other cryptographic information. Use of SSL could also be a trigger event occurring, for example, when the mobile device 100 user
5 browses or is pushed an SSL page. The encryption information may be obtained by the mobile device 100 issuing a URI query as described above, or may alternatively be obtained by the LDAP handler 400 issuing the URI query as described above.

In another embodiment, the throttling steps and compression/decompression steps are optional. The use of compression as well as throttling allows the method to be adapted
10 to various wireless network/mobile device combinations to ensure that an acceptable trade-off is achieved between minimizing RF bandwidth by compression, and minimizing the impact of additional mobile device processing by requiring decompression. Compression and throttling may be optionally invoked by a user of the mobile device 100, or by a system administration, or automatically depending on the size of the single pass
15 response.

With reference to Fig. 4, there is a block diagram of an exemplary wireless device 900 that may be used to realize the mobile device 100. The wireless device 900 is preferably a two-way communication device having at least voice and data communication capabilities. The device preferably has the capability to communicate with other computer
20 systems on the Internet. Depending on the functionality provided by the device, the device may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance or a data communication device (with or without telephony capabilities).

When the device 900 is enabled for two-way communications, the device will
25 incorporate a communication subsystem 911 including a receiver 912, a transmitter 914,

and associated components such as one or more antenna elements 916 and 918, local oscillators (LOs) 913, and a processing module such as a digital signal processor (DSP) 920. The particular design of the communication subsystem 911 will be dependent upon the communication network in which the device is intended to operate. For example, a
5 device 900 destined for a North American market may include a communication subsystem 911 designed to operate within the Mobitex mobile communication system or DataTAC mobile communication system, whereas a device 900 intended for use in Europe may incorporate a General Packet Radio Service (GPRS) communication subsystem 911.

Network access requirements will also vary depending upon the type of network
10 919, such as the wireless network 105 of Fig. 1. For example, in the Mobitex and DataTAC networks, mobile devices such as 900 are registered on the network using a unique personal identification number or PIN associated with each device. In GPRS networks, however, network access is associated with a subscriber or user of a device 900. A GPRS device therefore requires a subscriber identity module, commonly referred to as a
15 SIM card, in order to operate on a GPRS network.

Signals received by the antenna 916 through a communication network 919 are input to the receiver 912, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection and the like, and analog to digital conversion. Analog to digital conversion of a received signal allows more
20 complex communication functions such as demodulation and decoding to be performed in the DSP 920. In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by the DSP 920 and input to the transmitter 914 for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network 919 via the antenna 918.

The DSP 920 not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in the receiver 912 and transmitter 914 may be adaptively controlled through automatic gain control algorithms implemented in the DSP 920.

5 The device 900 preferably includes a microprocessor 938, which controls the overall operation of the device. Communication functions, including at least data and voice communications, are performed through the communication subsystem 911. The microprocessor 938 also interacts with further device subsystems such as the display 922, flash memory 924, random access memory (RAM) 926, auxiliary input/output (I/O)
10 subsystems 928, serial port 930, keyboard 932, speaker 934, microphone 936, a short-range communications subsystem 940 and any other device subsystems generally designated as 942.

 Some of the subsystems shown in Fig. 4 perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some
15 subsystems, such as keyboard 932 and display 922 for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list.

 Operating system software used by the microprocessor 938 is preferably stored in a persistent store such as flash memory 924, which may instead be a read only memory
20 (ROM) or similar storage element. The operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM 926. Received communication signals and data items may also be stored to RAM 926. The flash memory 924 preferably includes data communication module 924B, and when device 900 is enabled for voice communication, voice communication module 924A. Other software
25 modules may be stored in other flash memory modules 924N, which illustratively stores

software for the LDAP client 200, e-mail client 300, and cryptographic block 350 of Fig.

2.

The microprocessor 938, in addition to its operating system functions, preferably enables execution of software applications on the device. A predetermined set of

5 applications that control basic device operations, including at least data and voice communication applications, for example, will normally be installed on the device 900 during manufacture. A preferred application that may be loaded onto the device may be a personal information manager (PIM) application having the ability to organize and manage data items relating to the device user such as, but not limited to e-mail, calendar
10 events, voice mails, appointments, and task items. Naturally, one or more memory stores would be available on the device to facilitate storage of PIM data items on the device.

Such PIM application would preferably have the ability to send and receive data items, via the wireless network. In a one embodiment, the PIM data items are seamlessly integrated, synchronized and updated, via the wireless network, with the device user's corresponding
15 data items stored or associated with a host computer system. Further applications may also be loaded onto the device 900 through the network 919, an auxiliary I/O subsystem 928, serial port 930, short-range communications subsystem 940 or any other suitable subsystem 942, and installed by a user in the RAM 926 or preferably a non-volatile store for execution by the microprocessor 938. Such flexibility in application installation
20 increases the functionality of the device and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the device 900.

In a data communication mode, a received signal such as a text message or web
25 page download will be processed by the communication subsystem 911 and input to the

microprocessor 938, which will preferably further process the received signal for output to the display 922, or alternatively to an auxiliary I/O device 928. A user of device 900 may also compose data items such as e-mail messages, for example, using the keyboard 932, which is preferably a complete alphanumeric keyboard or telephone-type keypad, in

5 conjunction with the display 922 and possibly an auxiliary I/O device 928. Such composed items may then be transmitted over a communication network through the communication subsystem 911.

For voice communications, overall operation of the device 900 is substantially similar, except that received signals would preferably be output to a speaker 934 and
10 signals for transmission would be generated by a microphone 936. Alternative voice or audio I/O subsystems such as a voice message recording subsystem may also be implemented on the device 900. Although voice or audio signal output is preferably accomplished primarily through the speaker 934, the display 922 may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other
15 voice call related information, for example.

The serial port 930 would normally be implemented in a personal digital assistant (PDA)-type communication device for which synchronization with a user's desktop computer may be desirable, but is an optional device component. Such a port 930 would enable a user to set preferences through an external device or software application and
20 would extend the capabilities of the device by providing for information or software downloads to the device 900 other than through a wireless communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication.

A short-range communications subsystem 940 is a further optional component which may provide for communication between the device 900 and different systems or devices, which need not necessarily be similar devices. For example, the subsystem 940 may include an infrared device and associated circuits and components or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

Fig. 5 provides a flow chart 1000 of an illustrative method for an LDAP client query carried out at the mobile device 100. In step 1010, a stream connection with an LDAP URI is requested. The request may be sent from any computer device in communication with the wireless gateway 85 over one or more networks. In the case of the cryptographic messaging example, the request is sent from the mobile LDAP client 200 executing on the mobile device 100.

In step 1020, a stream connection to the LDAP handler 400 is opened. By opening this connection to the LDAP handler 400 rather than the LDAP server 40, the mobile device 100 is shielded from the chatty LDAP information exchange.

In step 1030, a connection input and output stream is obtained. The LDAP handler 400 uses the output stream to receive the URI sent in the subsequent step, and the LDAP client 200 uses the input stream to receive records from the LDAP handler 400 in the single pass response.

In step 1040, the URI is sent to the LDAP handler 400 by writing the URI to the output stream. The LDAP handler 400 then proceeds to perform the multi-pass query on behalf of the mobile device 100, and returns a throttled, optionally compressed, single-pass response as previously described.

In step 1050, the mobile device 100 determines if the input stream is compressed. This determination can be made, for example, by reading a Boolean value from the input

stream, written by the LDAP handler 400 to specify that the option to compress has been selected or deselected. If compression is selected, step 1060 ensues before step 1070. If compression is not selected, then step 1070 ensues.

5 In step 1060, a decompressor stream is applied to the input stream. The decompression can be implemented by several methods, such as by pipelining the input stream through a decompressor stream and then substituting the decompressor stream for the input stream in subsequent steps, for example.

Step 1070 determines if input stream is to receive data. This can be accomplished either by receiving a header file specifying the amount of data to be transmitted over the
10 input stream, or by reading a Boolean value from the input stream, written by the LDAP handler 400, which specifies that either a record is forthcoming, or that all records have been sent in the single-pass response. A timeout condition may further ensure that the mobile device 100 terminates the communication after a timeout. If input is to be received, then step 1080 ensues, else if no input is to be received, then step 1090 ensues.

15 In step 1080, a record is read from the input stream. This step defines the record format used in the single-pass response, which is specified by either the mobile device 100 or the LDAP handler 400. An example embodiment of a method to carry out this step is illustrated in Fig. 6. After receiving the record, step 1070 ensues to ensure that a single-pass is used.

20 In step 1090, a listener is notified of reception of the LDAP directory information. The listener is illustratively the e-mail client program 300 executing on the mobile device 100. The listener may then automatically terminate reception of further LDAP query data if the required information has been received, or may alternatively prompt the user of the mobile device 100 for further direction.

Fig. 6 provides a flow chart 1100 of an illustrative method for an LDAP client record reception method. The method of Fig. 6 is illustrative used to read record from input step 1080 of Fig. 5.

In step 1010, a request to read a record is received. Step 1120 determines if an input signal indicates a new entry at the input. This determination can be made, for example, by reading a Boolean value from the input, written by the LDAP handler 400, which specifies that a new entry is forthcoming in the current record, or that the current record applies to the current entry. If a new entry is at the input, then step 1130 ensues, or else step 1160 ensues.

10 In step 1130, a new entry is created. The entry comprises the received attributes of the record.

Step 1140 determines if at least one entry has been received, i.e., if the entry has received all of its attributes. If the determination is positive, then step 1150 ensues. If the determination is negative, then step 1160 ensues.

15 In step 1150, the listener is notified that an entry has been received, i.e., all of the entry attributes have been received. The listener may determine if the entry is the desired LDAP directory information, and if so, no additional records need to be received and the communication can be terminated. Alternatively, the mobile device 100 can be configured to prompt the user so that the user may determine if the entry is the desired LDAP
20 directory information.

Step 1160 determines if the input has a new attribute. This determination can be made, for example, by reading a Boolean value from the input, written by the LDAP handler 400, which specifies that a new attribute is forthcoming in the current record. If a new attribute is determined, step 1170 ensues; or else step 1180 ensues to signal that a
25 record has been read.

In step 1170, an attribute from input stream is read and added to an entry. This can be accomplished, for example, by reading the name of the attribute from the input, written by the LDAP handler 400, then reading a Boolean value from the input signalling whether the attribute is binary or textual, and reading the binary or textual attribute from the input.

5 The read attribute is then added to the current entry.

Step 1180 ends the record reception method and notifies a listener in the mobile device 100 that a record has been read.

Fig. 8 provides a functional block diagram 2000 illustrating the handling of a client information request by a request handler. The information request illustratively is of the form of an LDAP query; however, other information requests may also be handled by a system and/or method as depicted in Fig. 8. A client system may have a client information requirement 2002 to be served by an external system, such as an LDAP server. The client information requirement 2002 may be a requirement for a digital certificate, a public key, particular contact information, or some other information requirement. The client information requirement 2002 is to be served in a single pass communication.

The client system issues a request to serve the client information requirement 2002 to a handler system, which executes a request handler program 2004. The request handler program 2004 handles the client information requirement 2002 request for the client system, and establishes a communication with a server system, or some other computing device, which executes a request server program 2006 that responds to the client information requirement 2002. The request handler program 2004 receives and monitors the multi-pass communication from the server system, and determines if the data received from the server system exceeds a client system threshold requirement, such as size or record count. If the data does exceed the client system threshold requirement, then the

request handler program 2004 uses a throttle 2008 to transmit the data received up to the threshold requirement to the client system in a single-pass reply communication. If the data does not exceed the client system threshold requirement, then the request handler program 2004 transmits the data received to the client system in a single-pass reply
5 communication.

The throttle 2008 illustratively throttles the received data by limiting the single-pass reply communication to a throttled reply 2010. The throttle reply 2010 may not include all of the data received in the multi-pass communication from the server, as illustrated by the throttled reply 2010 originating at a point within the multi-pass
10 communication.

The throttled reply 2010 may be generated by several methods. In one embodiment, the request handler program 2004 may receive the entire multi-pass communication and store the received data at the handler system. The request handler program 2004 may then determine if the received data exceeds the client system threshold
15 requirement. If the received data exceeds the client system threshold requirement, then the request handler program 2002 selects a subset of the data received and sends the data subset to the client system. The request handler program 2004 may optionally include refinement data to request the client system to refine the information requirement or request the client system to confirm receipt of the additional data received in the multi-
20 pass response but not sent to the client system.

In another embodiment, the request handler program 2004 monitors the multi-pass communication to determine if the received data exceeds the client system threshold requirement. If the received data exceeds the client system threshold requirement, then the request handler program 2002 terminates the multi-pass communication and sends the
25 received data to the client system. The request handler program 2004 may optionally

include refinement data to request the client system to refine the information requirement. Of course, other methods of throttling the multi-pass communication may also be used.

While the LDAP handler 400 has been described as a software program executed on the wireless gateway 85, the LDAP handler 400 may also be a software program
5 executed on the LDAP server 40. For example, the LDAP handler 400 can be accessible via an alternate port on the LDAP server 40. The alternate port may be designated in the URI, and thus the URI can be selected to either specify a convention, multi-pass LDAP query (e.g., "ldap://...") or a single-pass LDAP query (e.g., "mldap://..."). Furthermore, a multi-pass LDAP query may then be converted to a single-pass LDAP query by
10 modifying the URI, e.g., adding a leading "m" to the URI "ldap://..." to obtain the URI "mldap://...". Likewise, a single-pass LDAP query may then be converted to a multi-pass LDAP query by stripping the leading "m" to obtain the URI "ldap://..."

Fig. 9 provides a functional block diagram illustrating the handling of a client information request by a request handler executed on a server system. The information
15 request illustratively is of the form of an LDAP query; however, other information requests may also be handled by a system and/or method as depicted in Fig. 9. A client system may have a client information requirement 2102 to be served by an external system, such as an LDAP server. The client information requirement 2102 may be a requirement for a digital certificate, a public key, particular contact information, or some
20 other information requirement. The client information requirement 2102 is to be served in a single pass communication.

The client system issues a request to serve the client information requirement 2102 to an intermediate device, illustratively a gateway program 2104 executed on the wireless gateway 85. The gateway program 2104 sends the request to a handler program 2106
25 executed on an LDAP server. The request handler program 2106 handles the client

information requirement 2102 request for the gateway program 2104, and communicates with a request server program 2110 that responds to the client information requirement 2102. The request handler program 2106 receives and monitors the multi-pass communication from the request server program 2110, and determines if the data received
5 from the request server program 2110 exceeds a client system threshold requirement, such as size or record count.

The client system threshold requirement may be provided to the request handler program 2106 with the request when transmitted from the gateway program 2104, or may alternatively be previously stored and accessible by the request handler program 2106.

10 If the data does exceed the client system threshold requirement, then the request handler program 2106 uses a throttle 2108 to transmit the data received up to the threshold requirement to the wireless gateway 85 in a single-pass reply communication. If the data does not exceed the client system threshold requirement, then the request handler program 2106 transmits the data received to the wireless gateway 85 in a single-pass reply
15 communication. The gateway program 2104 on the wireless gateway 85 then transmits the data received from the handler program 2016 to the client system in a single pass communication.

The embodiments disclosed herein are illustrative, and other configurations and communication paths for computer systems distributed throughout one or more networks
20 that enable the functionality of the LDAP handler system as disclosed herein may also be used.

The embodiments described herein are examples of structures, systems or methods having elements corresponding to the elements of the invention recited in the claims. This written description may enable those of ordinary skill in the art to make and use
25 embodiments having alternative elements that likewise correspond to the elements of the

invention recited in the claims. The intended scope of the invention thus includes other structures, systems or methods that do not differ from the literal language of the claims, and further includes other structures, systems or methods with insubstantial differences from the literal language of the claims.

What is claimed is:

1. A system for handling a Lightweight Directory Access Protocol (LDAP) service request to an LDAP server for an LDAP service, the system comprising:
 - a client program executable on a client system, the client program operable
5 to generate LDAP service request data corresponding to the LDAP service and provide the LDAP service request data for transmission from the client system, and further operable to receive LDAP service reply data in response to the LDAP service request data; and
 - a handler program executable on a handler system, the handler program
operable to receive the LDAP service request data transmitted from the client system and
10 execute the LDAP service request to the LDAP server, receive LDAP service reply data from the LDAP server during one or more passes, and upon completion of the LDAP service, provide the LDAP service reply data for transmission to the client system in a single pass.
2. The system of claim 1, wherein the handler program is further operable to
15 throttle the LDAP service reply data to generate throttled LDAP service reply data if the LDAP service reply data exceeds a threshold, and provide the throttled LDAP service reply data for transmission to the client system in a single pass.
3. The system of claim 2, wherein the handler program is further operable to append refinement data to the throttled LDAP service reply data.
- 20 4. The system of claim 3, wherein the client program is further operable to generate revised LDAP service request data in response to receiving the refinement data and provide the revised LDAP service request data for transmission from the client system.
5. The system of claim 4, wherein the client system comprises a mobile
25 device operable to communicate over a wireless network.

6. The system of claim 5, wherein the LDAP service request data comprises a Uniform Resource Identifier (URI).

7. The system of claim 6, wherein the URI comprises an LDAP query for a digital certificate.

5 8. The system of claim 6, wherein the URI comprises an LDAP query for a public key.

9. The system of claim 3, wherein the handler program is further operable to compress the LDAP service reply data and the throttled LDAP service reply data prior to transmission to the client system.

10 10. The system of claim 3, wherein the LDAP service reply data comprises data records, and threshold comprises a record count.

11. The system of claim 10, wherein the LDAP service reply data is throttled to generate the throttled LDAP service reply data by limiting the LDAP service reply data to the record count of data records.

15 12. The system of claim 11, wherein the LDAP service request data comprises an LDAP query for a digital certificate.

13. The system of claim 12, wherein the handler program is further operable to append refinement data to the throttled LDAP reply data and provide the refinement data for transmission to the client system.

20 14. The system of claim 13, wherein the client program is further operable to generate revised LDAP service request data in response to receiving the refinement data and provide the revised LDAP service request data for transmission from the client system.

15. The system of claim 1, wherein the LDAP service request data comprises an LDAP query for a digital certificate, and wherein the LDAP service reply data comprises digital certificate data.

16. The system of claim 2, wherein the handler system is operable to redirect a
5 data item to the client system, and the handler program is further operable to determine whether the data item includes encryption data and upon a determination that data item includes encryption data generate automatic LDAP service request data and execute a corresponding automatic LDAP service request to the LDAP server.

17. The system of claim 16, wherein the handler program is further operable to
10 store the data item at the handler system until the LDAP service reply data is received, and then redirect the data item and the LDAP service reply data or the throttled LDAP service reply data to the client system.

18. The system of claim 17, wherein the handler system is a wireless gateway.

19. The system of claim 17, wherein the handler system is a redirector system.

15 20. A system for handling a Lightweight Directory Access Protocol (LDAP) service request to an LDAP server for an LDAP service, the system comprising:

a handler program executable on a handler system, the handler program operable to receive LDAP service request data corresponding to the LDAP service request and execute the LDAP service request to the LDAP server, receive LDAP service reply
20 data from the LDAP server during one or more passes, throttle the LDAP service reply data to generate throttled LDAP service reply data if the LDAP service reply data exceeds a threshold, and provide the LDAP service reply data or throttled LDAP service reply data for transmission to a client system in a single pass.

21. The system of claim 20, wherein the handler program is further operable to
25 append refinement data to the throttled LDAP service reply data.

22. The system of claim 21, wherein the handler program is further operable to compress the LDAP service reply data and the throttled LDAP service reply data prior to transmission to the client system.

23. The system of claim 22, wherein the LDAP service reply data comprises
5 data records, and the threshold comprises a record count.

24. The system of claim 23, wherein the LDAP service reply data is throttled to generate the throttled LDAP service reply data by limiting the LDAP service reply data to the record count of data records.

25. The system of claim 24, wherein the LDAP service request comprises a
10 query for a digital certificate.

26. The system of claim 20, wherein the handler system is operable to redirect a data item to the client system, and the handler program is further operable to determine whether the data item includes encryption data and upon a determination that data item includes encryption data generate automatic LDAP service request data and execute a
15 corresponding automatic LDAP service request to the LDAP server.

27. The system of claim 26, wherein the handler program is further operable to store the data item at the handler system until the LDAP service reply data is received, and then redirect the data item and the LDAP service reply data or the throttled LDAP service reply data to the client system

28. A method for handling a Lightweight Directory Access Protocol (LDAP)
20 service request to an LDAP server for an LDAP service, the method comprising the steps of:

receiving LDAP service request data transmitted from a client system, the LDAP service request data corresponding to the LDAP service request;

25 executing at a handler system the LDAP service request;

receiving at the handler system LDAP service reply data from the LDAP server during one or more passes during execution of the LDAP service; and transmitting the LDAP service reply data received at the handler system to the client system in a single pass.

5 29. The method of claim 28, further comprising the steps of:

 throttling the LDAP service reply data to generate throttled LDAP service reply data if the LDAP service reply data exceeds a threshold; and transmitting the throttled LDAP service reply to the client system in a single pass.

 30. The method of claim 29, further comprising the step of
10 generating refinement data for the throttled LDAP service reply data; and transmitting the refinement data to the client system.

 31. The method of claim 30, wherein the LDAP service request data comprises a Uniform Resource Identifier (URI).

 32. The method of claim 31, wherein the URI comprises an LDAP query for a
15 digital certificate.

 33. The method of claim 30, further comprising the step of compressing the LDAP service reply data and the throttled LDAP service reply data prior to transmission to the client system.

 34. The method of claim 29, wherein the step of throttling the LDAP service
20 reply data to generate the throttled LDAP service reply data if the LDAP service reply data exceeds a threshold comprises the steps of:

 determining the amount of the LDAP service reply data received;

 comparing the amount of LDAP service reply data received to the threshold; and

 transmitting only the threshold amount of the LDAP service reply data received if
25 the LDAP service reply data received exceeds the threshold.

35. The system of claim 34, wherein the LDAP service reply data comprises digital certificate data.

36. The system of claim 34, further comprising the step of compressing the LDAP service reply data and the throttled LDAP service reply data before transmission.

5 37. A method for accessing digital certificate data stored in a Lightweight Directory Access Protocol (LDAP) server, the digital certificate data requested by a client system, the method comprising the steps of:

receiving at a handler system a Uniform Resource Identifier (URI) query for the digital certificate data, the query transmitted from a mobile device;

10 executing at the handler system the query to the LDAP server;

receiving the digital certificate data from the LDAP server during one or more passes during execution of the query;

determining if the digital certificate data received exceeds a threshold;

upon a determination that the digital certificate data received exceeds a threshold:

15 throttling the digital certificate data received to create throttled digital certificate data; and

transmitting the throttled digital certificate data to the mobile device in a single pass; and

20 upon a determination that the digital certificate data received does not exceed a threshold, transmitting the digital certificate data received to the mobile device in a single pass.

38. The method of claim 37, further comprising the step of compressing the digital certificate data and the throttled digital certificate data prior to transmitting the digital certificate data and the throttled digital certificate data to the mobile device.

39. The method of claim 38, wherein the step of throttling the digital certificate data received to create throttled digital certificate data comprises the step of selecting only the threshold amount of the digital certificate data received for transmission to the mobile device in a single pass.

5 40. A system for handling a Lightweight Directory Access Protocol (LDAP) service request to an LDAP server for an LDAP service, the system comprising:

handler means for receiving the LDAP service request data corresponding to the LDAP service request and executing the LDAP service request to the LDAP server, for receiving LDAP service reply data from the LDAP server during one or more passes, for
10 throttling the LDAP service reply data to generate throttled LDAP service reply data, and for transmitting the LDAP service reply data or the throttled LDAP service reply data; and

client means for generating the LDAP service request data corresponding to the LDAP service and transmitting the LDAP service request data to the handler means, and for receiving the LDAP service reply data or the throttled LDAP service reply data from
15 the handler means.

41. The system of claim 40, wherein the handler means is further adapted for appending refinement data to the throttled LDAP service reply data and for transmitting the refinement data with the throttled LDAP service reply data.

42. The system of claim 41, wherein the handler means is further adapted for
20 compressing the LDAP service reply data and the throttled LDAP service reply data prior to transmission.

43. A system for accessing digital certificates stored in a Lightweight Directory Access Protocol (LDAP) server, the system comprising:

a client program executable on a client system, the client program operable
25 to generate an LDAP query requesting digital certificate data and provide the LDAP query

for transmission from the client system, and further operable to receive digital certificate data in response to the LDAP query; and

a handler program executable on a handler system, the handler program operable to receive the LDAP query transmitted from the client system and execute the LDAP query, receive the digital certificate data in response to the LDAP query during one
5 or more passes, and upon completion of the execution of the LDAP query, provide the digital certificate data for transmission to the client system in a single pass.

44. The system of claim 43, wherein the handler program is further operable to throttle the digital certificate data to generate throttled digital certificate data if the digital
10 certificate data exceeds a threshold, and provide the throttled digital certificate data for transmission to the client system in a single pass.

45. The system of claim 44, wherein the handler program is further operable to append refinement data to the throttled digital certificate data and provide the refinement data for transmission to the client system.

15 46. The system of claim 45, wherein the client program is further operable to generate a revised LDAP query for digital certificate data in response to receiving the refinement data and provide the revised LDAP query for transmission from the client system.

20 47. The system of claim 46, wherein the client system comprises a mobile device operable to communicate over a wireless network.

48. The system of claim 47, wherein the handler system comprises a wireless gateway.

49. The system of claim 47, wherein the handler system comprises an LDAP server.

50. The system of claim 47, wherein the handler system comprises a redirector system.

51. A system for accessing digital certificates stored in a Lightweight Directory Access Protocol (LDAP) server, the system comprising:

5 a handler program executable on a handler system, the handler program operable to receive an LDAP query requesting digital certificate data from a client system and execute the LDAP query, receive the digital certificate data in response to the LDAP query during one or more passes, and upon completion of the execution of the LDAP query, throttle the digital certificate data to generate throttled digital certificate data, and
10 provide the digital certificate data or throttled digital certificate data for transmission to the client system in a single pass.

52. The system of claim 50, wherein the handler program is further operable to append refinement data to the throttled digital certificate data.

53. The system of claim 52, wherein the handler system is a wireless gateway.

15 54. The system of claim 53, wherein the client system is a mobile device.

55. The system of claim 52, wherein the handler system is an LDAP server.

56. The system of claim 55, wherein the client system is a wireless gateway.

57. A method for accessing encryption data stored in a database server, the encryption data requested by a client system, the method comprising the steps of:
20 receiving at a handler system a database query for the encryption data, the query transmitted from a mobile device;

executing at the handler system the database query to the database server;

receiving the encryption data from the database server during one or more passes during execution of the query; and

25 transmitting the encryption data received to the mobile device in a single pass.

58. The method of claim 57, further comprising the steps of:
determining if the encryption data received exceeds a threshold; and
if the encryption data received exceeds a threshold:

throttling the encryption data received to create throttled encryption data;

5 and


transmitting the throttled encryption data to the mobile device in a single
pass.


59. The method of claim 58, wherein the step of throttling the encryption data
received to create throttled encryption data comprises the step of selecting only the
10 threshold amount of the encryption data received for transmission to the mobile device in
a single pass.

60. The method of claim 59, wherein the encryption data comprises digital
certificate data.

15

1/10

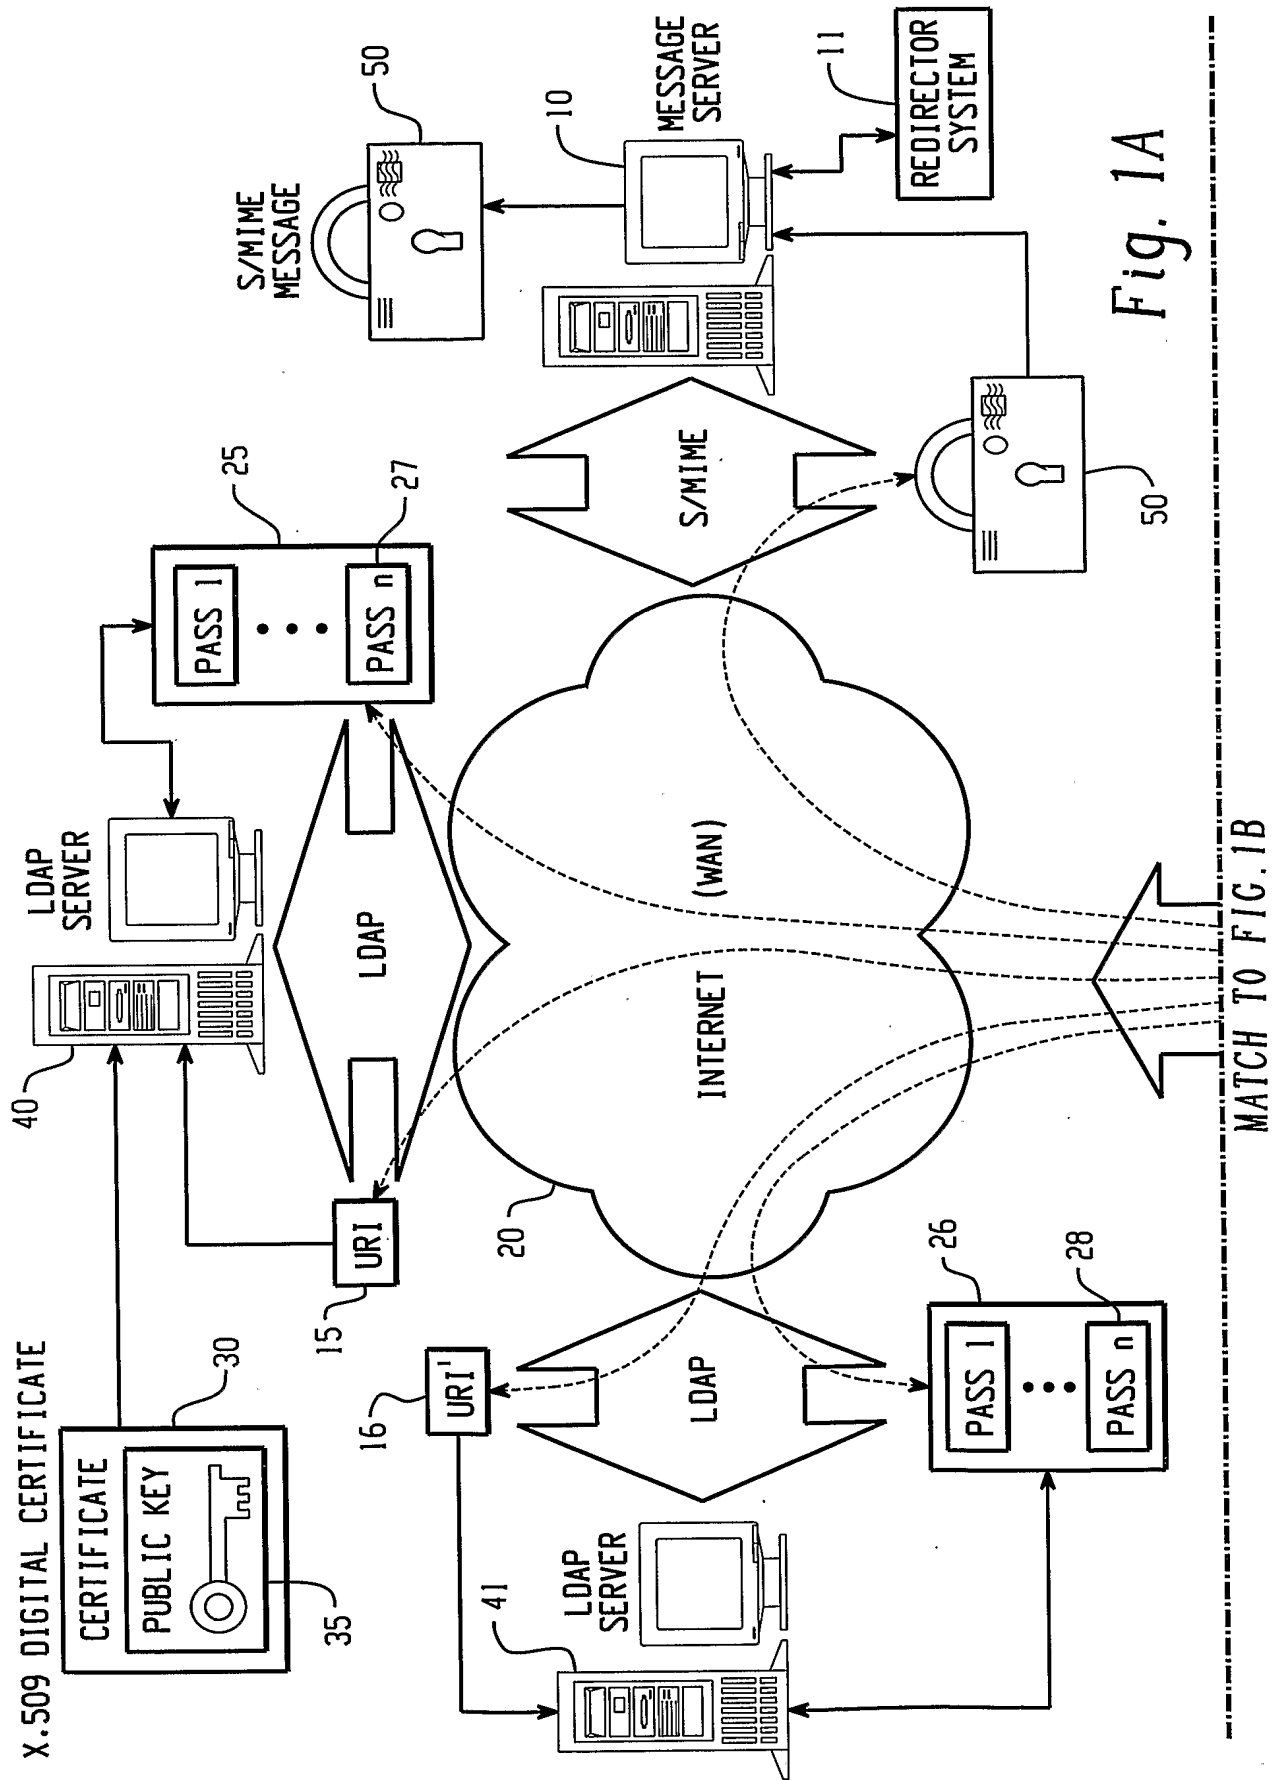

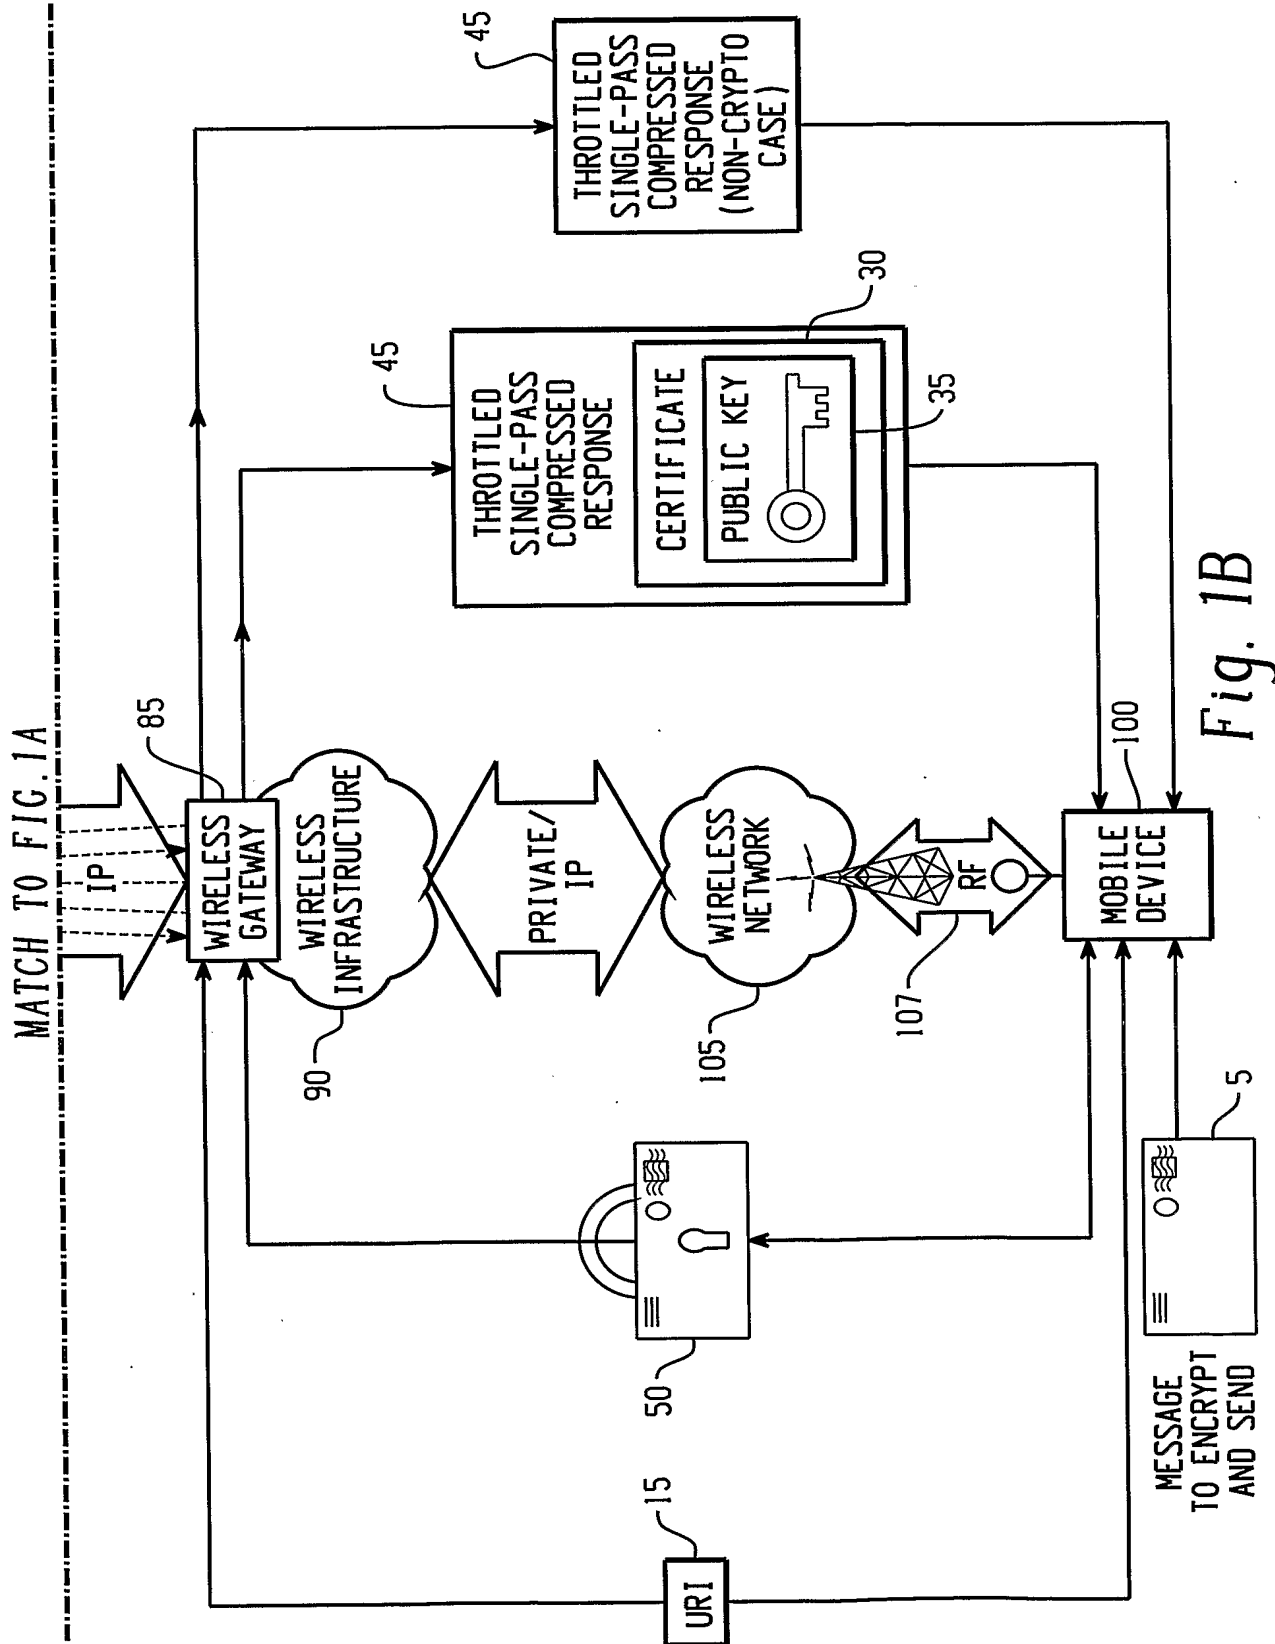

3/10

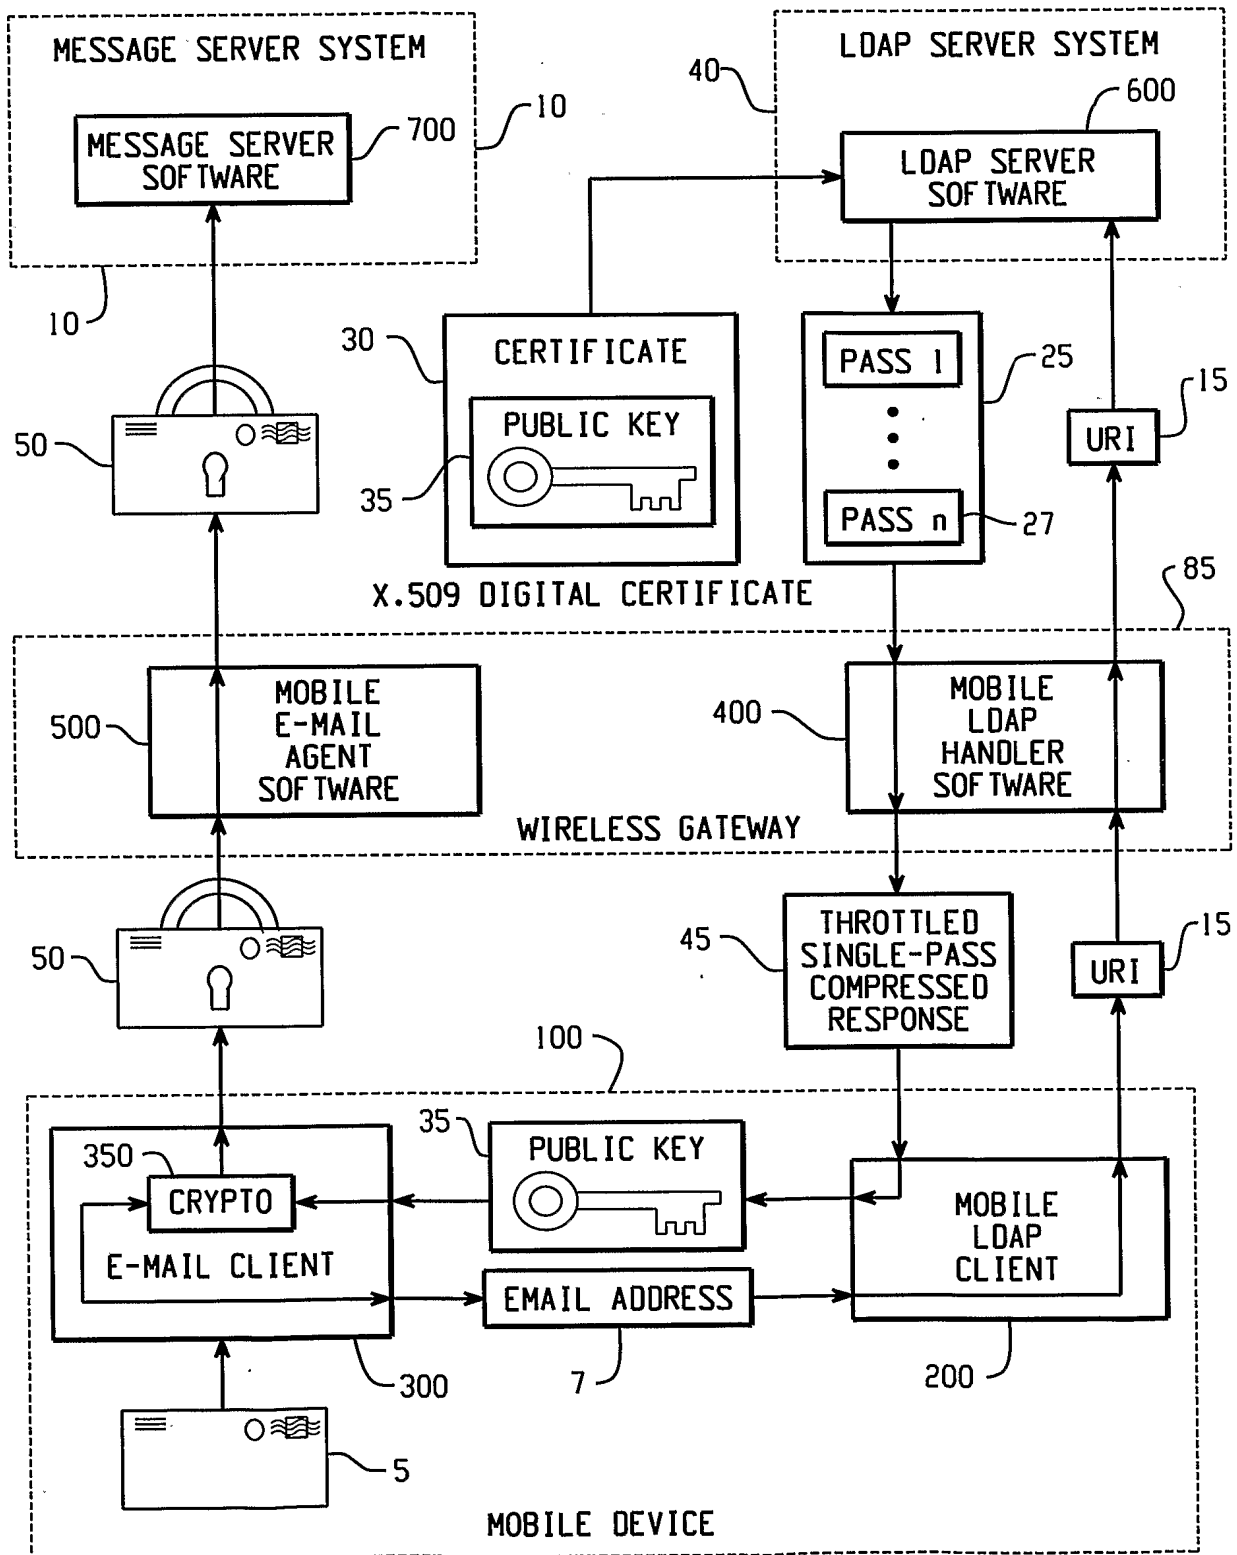


Fig. 2

4/10

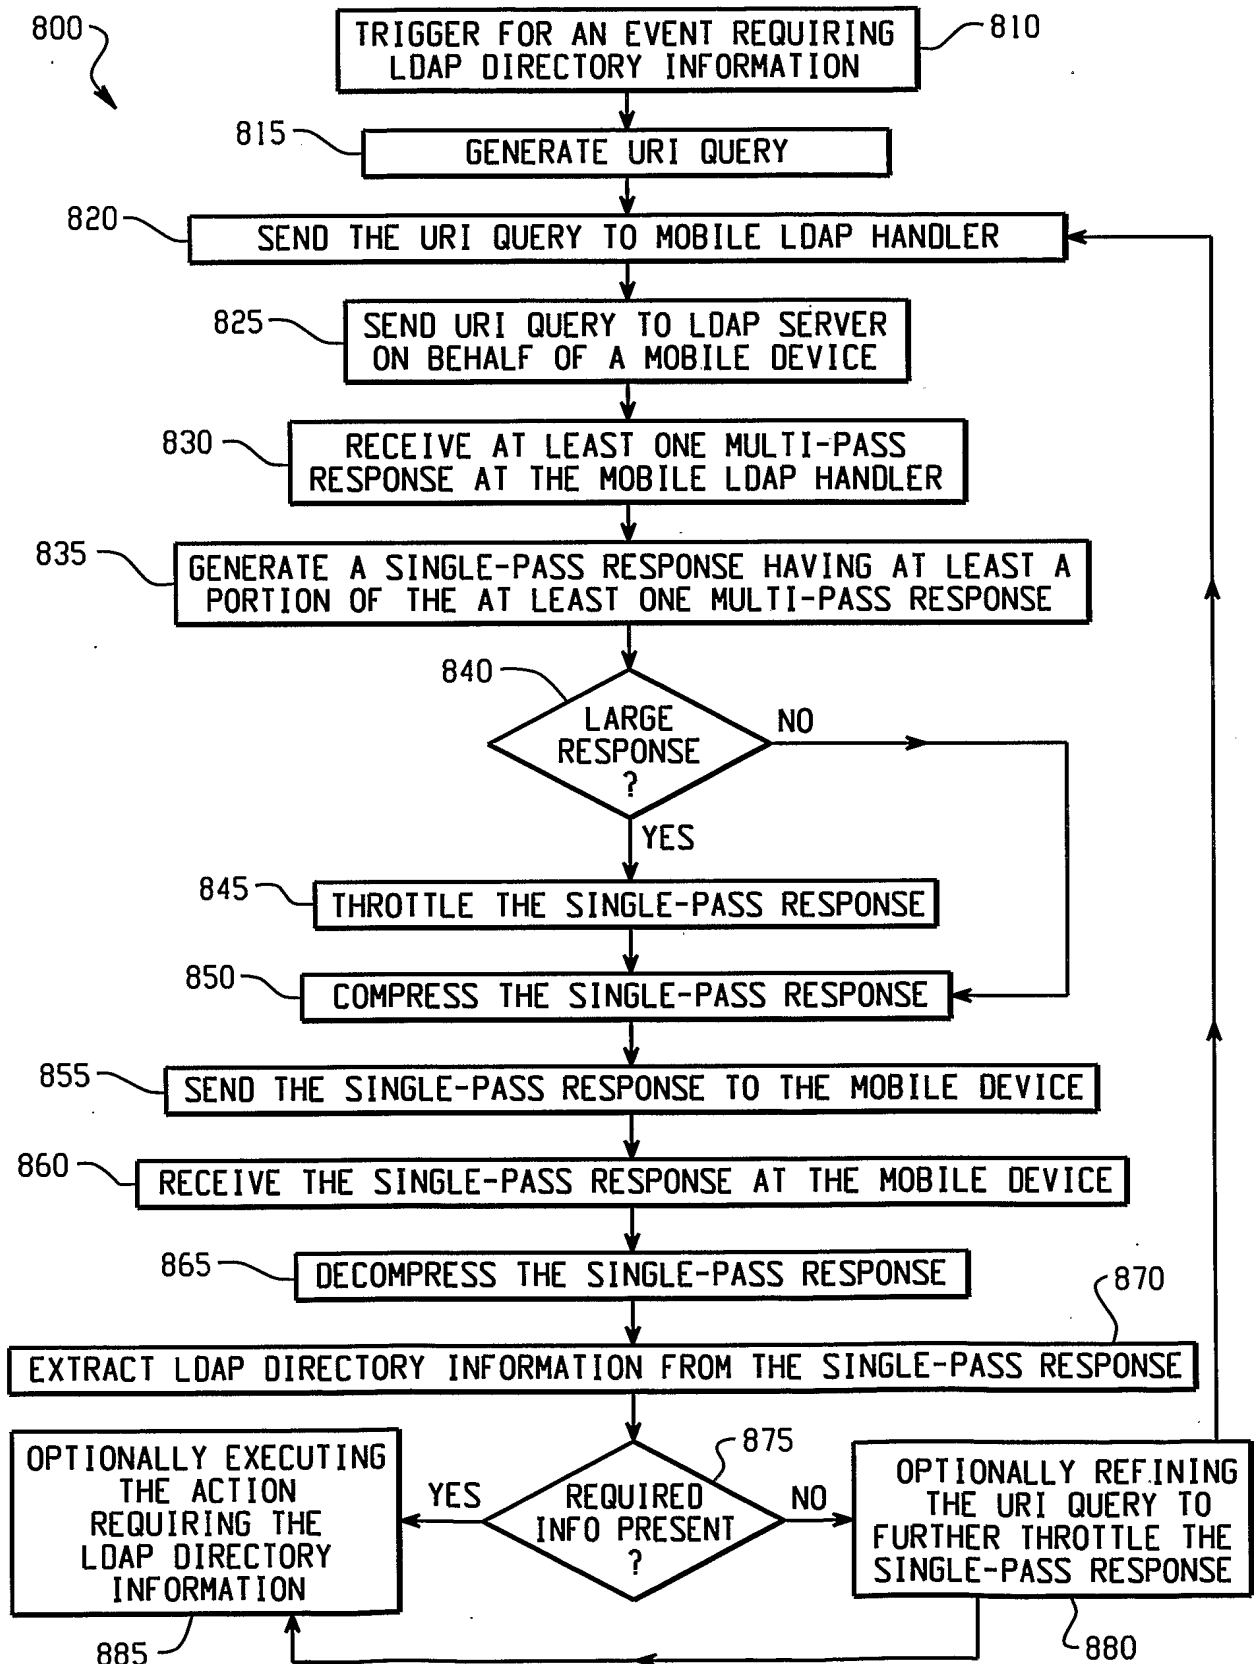


Fig. 3

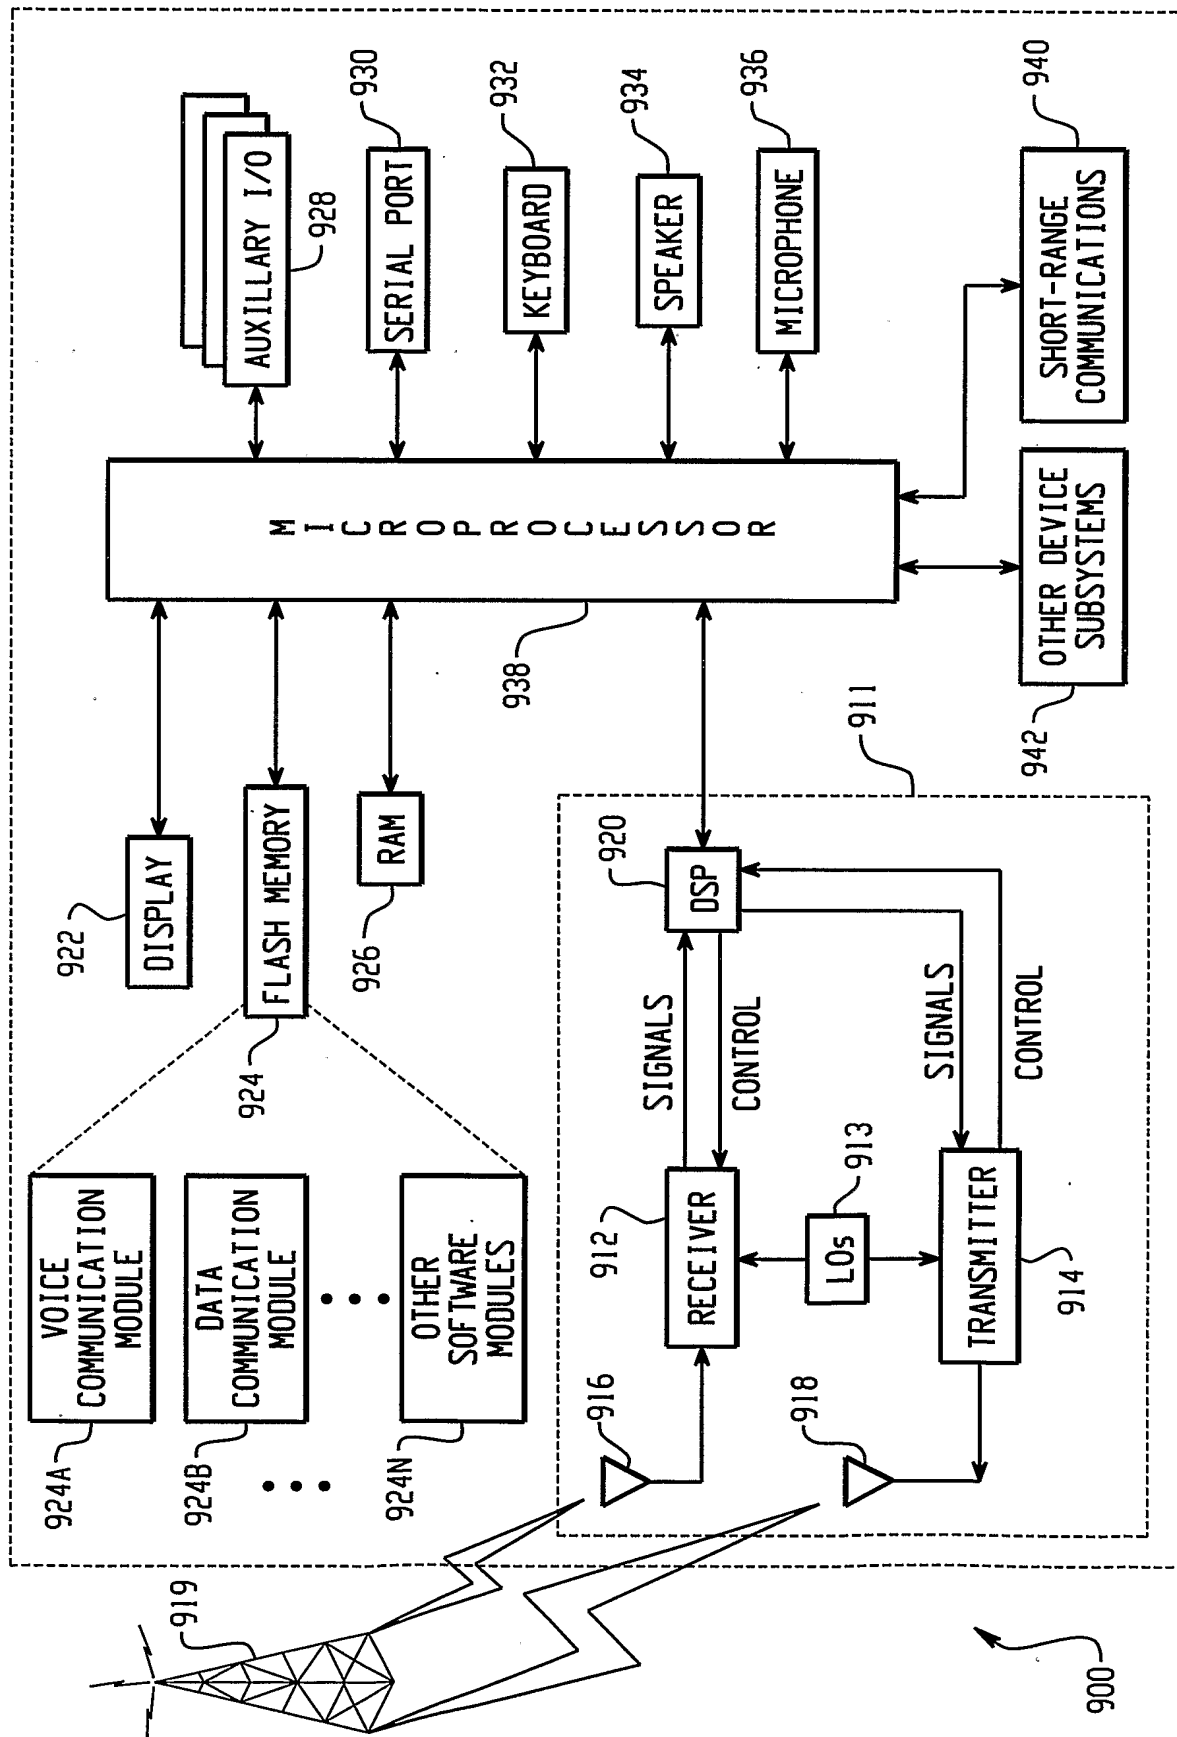


Fig. 4

6/10

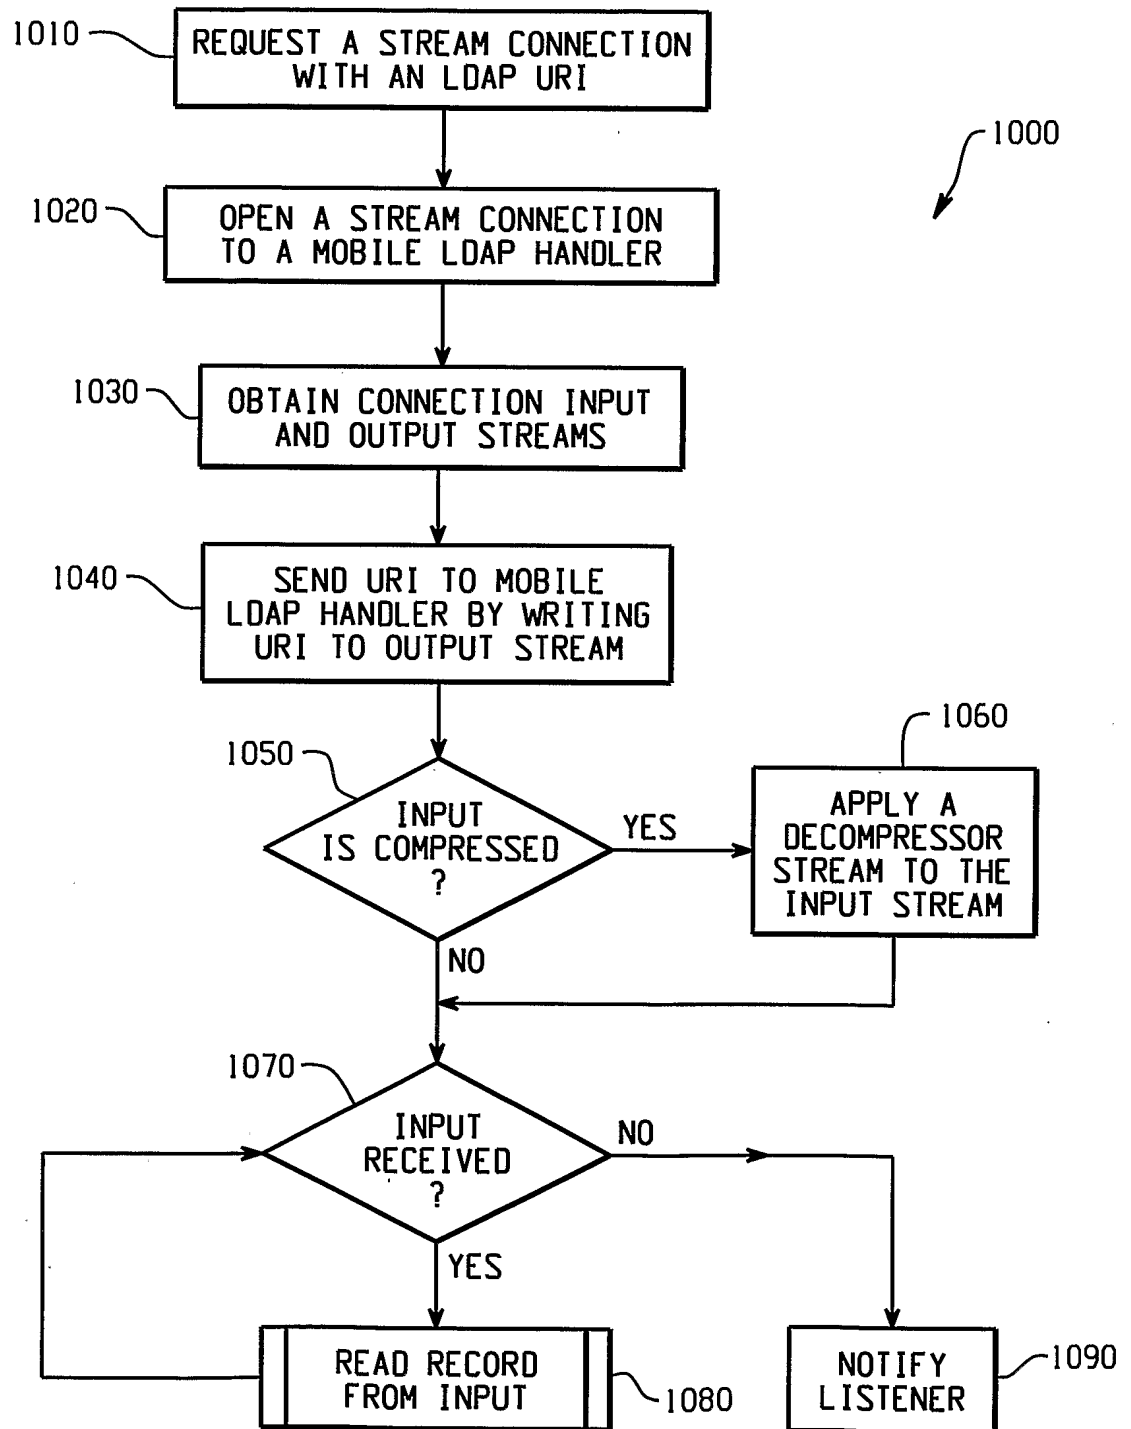


Fig. 5

7/10

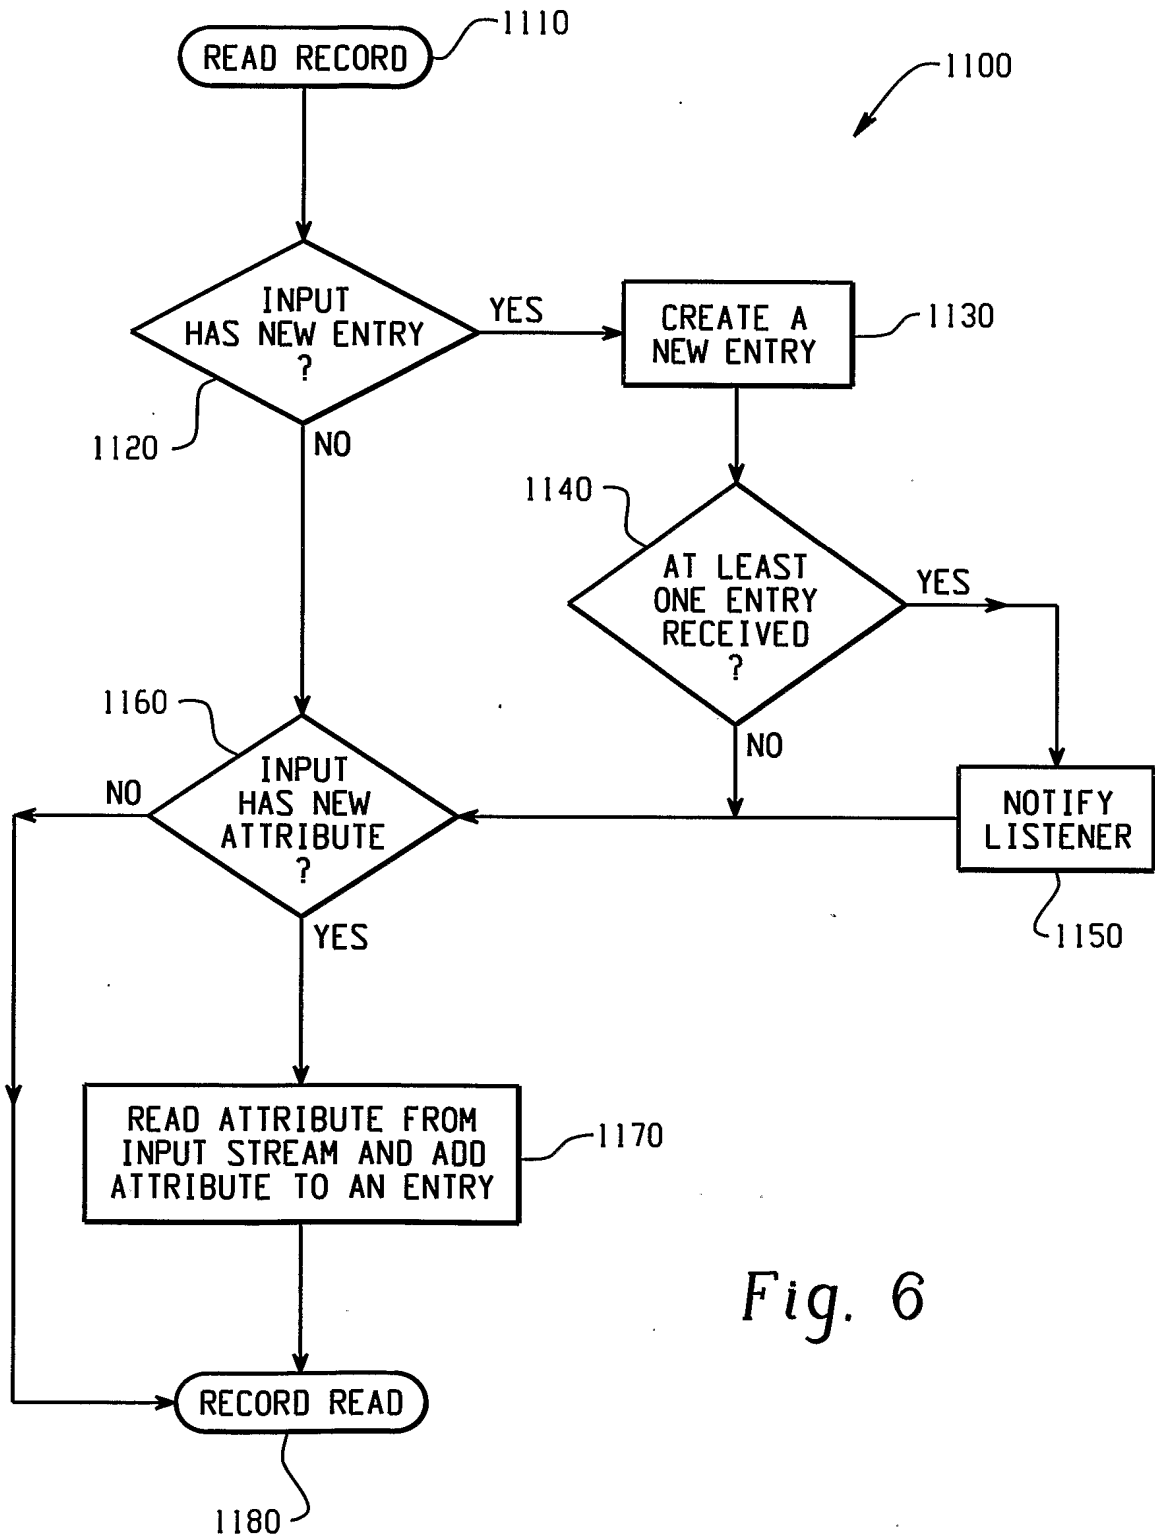


Fig. 6

8/10

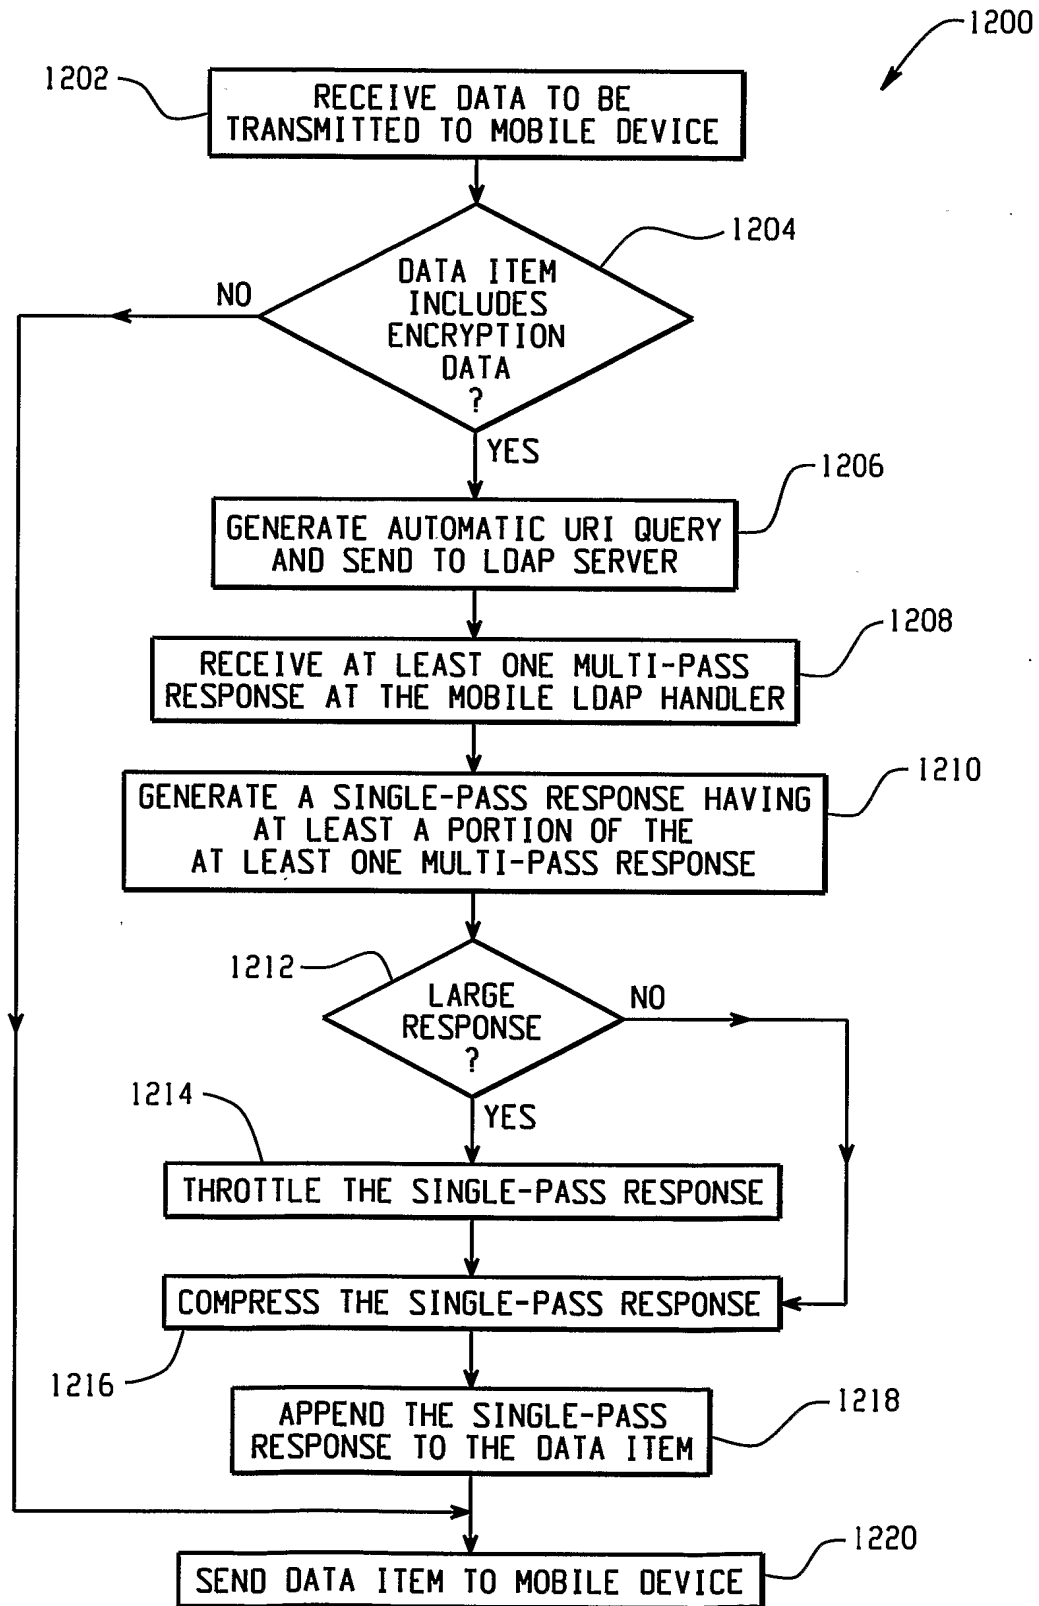


Fig. 7

9/10

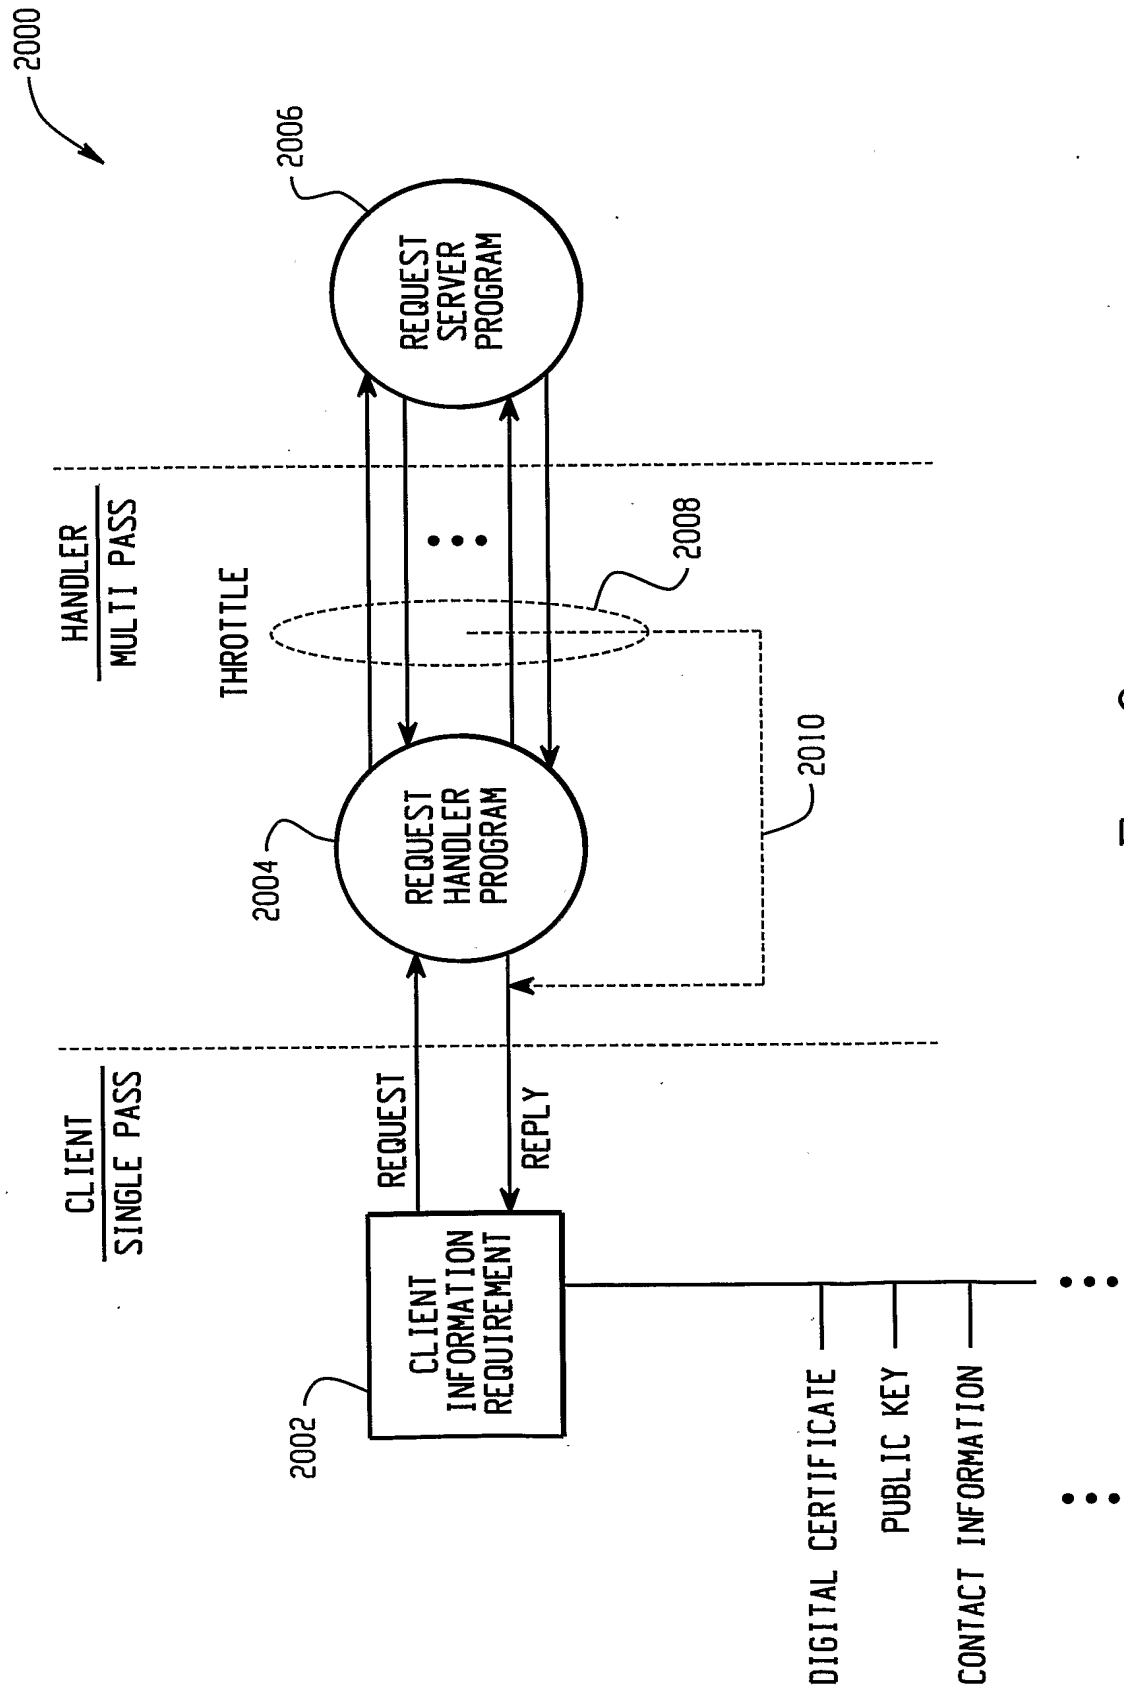


Fig. 8

10/10

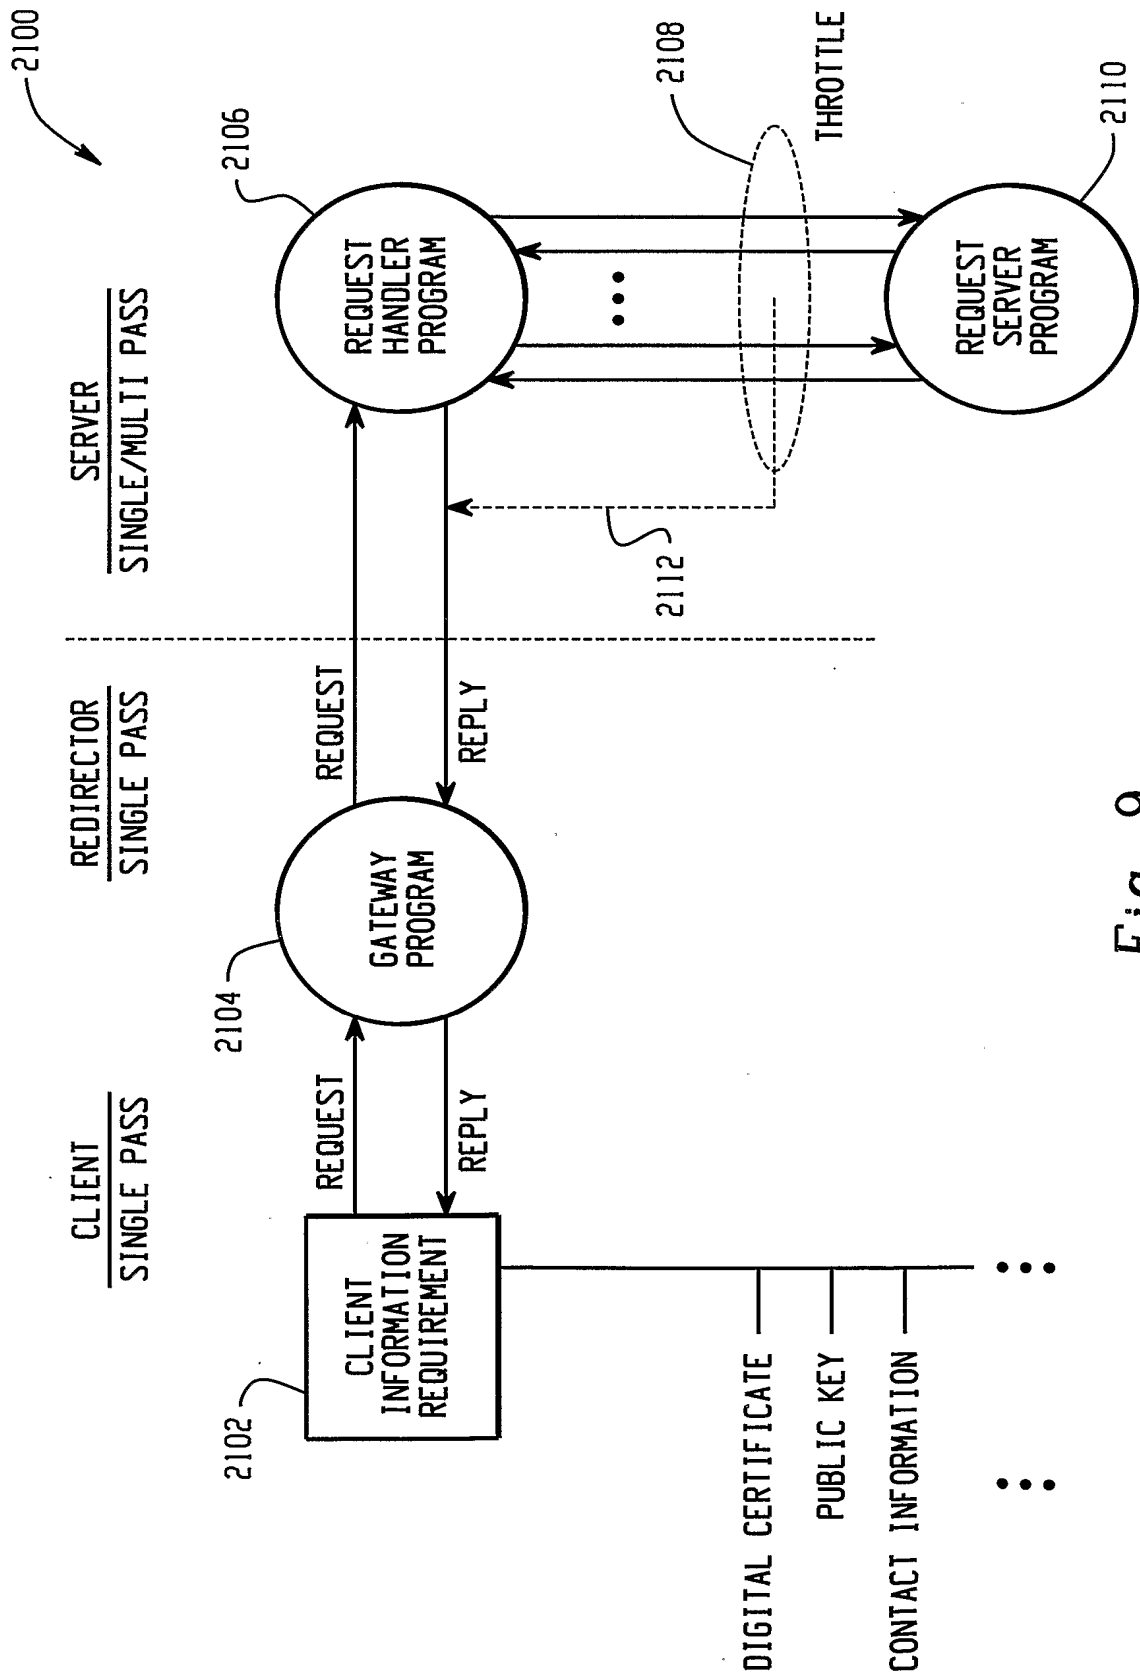


Fig. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00407

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L29/08 G06F17/30 H04L29/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 113 648 A (NORTEL NETWORKS CORP) 4 July 2001 (2001-07-04) abstract; figure 1 page 4, paragraph 26 - paragraph 28 page 5, paragraph 33 ---	1, 28
X	GLOMOP GROUP: "GloMop: Global Mobile Computing By Proxy" GLOMOP GROUP, 13 September 1995 (1995-09-13), XP002094009 Retrieved from the Internet: <URL:http://www.cs.berkeley.edu/fox/glomop /glomop_posn.ps> 'retrieved on 1995-09-13! the whole document ---	1-15, 20-25, 28-49, 51-60
Y	---	16-19, 26, 27, 50
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

21 July 2003

Date of mailing of the international search report

29/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Figiel, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00407

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 176 785 A (RES IN MOTION LTD) 30 January 2002 (2002-01-30) abstract; figure 2 column 1, paragraphs 1,2 column 2, paragraph 8 column 5, paragraph 20; figure 3 ---	1-15, 20-25, 28-49, 51-60
X	FOX A ET AL: "Reducing WWW latency and bandwidth requirements by real-time distillation" COMPUTER NETWORKS AND ISDN SYSTEMS, NORTH HOLLAND PUBLISHING. AMSTERDAM, NL, vol. 28, no. 11, 1 May 1996 (1996-05-01), pages 1445-1456, XP004018241 ISSN: 0169-7552 paragraphs '0001!-'0003! ---	1,2,20, 28,37, 40,43, 51,57
Y	US 6 073 175 A (TAVS JOHN EDWARD ET AL) 6 June 2000 (2000-06-06)	16-19, 26,27,50
A	abstract; figures 1,3 column 1, line 61 -column 2, line 2 column 3, line 3 - line 12 column 5, line 59 -column 6, line 3 ---	1,2,20, 28,37, 40,43, 51,57
A	LUOTONEN A ET AL: "World-Wide Web proxies" COMPUTER NETWORKS AND ISDN SYSTEMS, NORTH HOLLAND PUBLISHING. AMSTERDAM, NL, vol. 27, no. 2, 1 November 1994 (1994-11-01), pages 147-154, XP004037985 ISSN: 0169-7552 paragraph '01.1! ---	1,2,20, 28,37, 40,43, 51,57
X	ZENEL B ET AL: "Intelligent communication filtering for limited bandwidth environments" WORKSHOP ON HOT TOPICS IN OPERATING SYSTEMS, XX, XX, 4 May 1995 (1995-05-04), pages 28-34, XP002094011 the whole document -----	1,2,57

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/00407

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1113648	A	04-07-2001	AU EP	7249600 A 1113648 A2
				05-07-2001 04-07-2001
EP 1176785	A	30-01-2002	CA EP	2353359 A1 1176785 A1
				24-01-2002 30-01-2002
US 6073175	A	06-06-2000	NONE	